




CRYSTAL OSCILLATORS HCMOS/TTL 5V

SURFACE MOUNT
T1250, T1254,
T1256, T1258
T3250, T3254,
T3256, T3258
T4001 thru T4009
T4301 thru T4309



5 x 7 mm Surface Mount Extended Temperature/COTS 20 KHz to 100 MHz

FEATURES

- Tiny 5 x 7 SMD form factor
- Hermetically sealed for rugged environmental conditions
- Extremely wide operating temperature range accommodates harsh environments
- All crystals are processed in-house with tight angle control to assure best frequency-temperature characteristics
- All units are vacuum baked before sealing at 175°C for 16 hours to eliminate moisture traces and pre-age units for superior aging

TYPICAL APPLICATIONS

Any electronic circuit requiring 5V HCMOS clocking that is exposed to very high or very low temperatures such as oil drilling or weather observation equipment.


Description

Owing to their small size, light weight, and rugged characteristics, these 5V HCMOS extended temperature/COTS oscillators fulfill tasks not previously feasible. They are used in applications that take advantage of their extended temperature range and high performance. Twenty four different models (with and without tristate) cover -55°C to +200°C operation and provide frequency selection from 20 KHz to 100 MHz. They combine excellent long-term reliability, loading characteristics, and superior startup performance.

FIXED OUTPUT		TRISTATE		Frequency Stability	Temperature
MODEL	Marking Letter ID*	MODEL	Marking Letter ID*		
T1250	FL	T3250**	FM	±75 ppm	-40 to +85°C
T1254	N	T3254	T	±50 ppm	0 to 175°C
T1256	K	T3256	L	±75 ppm	-55 to +85°C
T1258	I	T3258**	J	±100 ppm	-40 to +85°C
T4001	M	T4301	AQ	±500 ppm	-55 to 200°C
T4002	AD	T4302	AR	±500 ppm	0 to 200°C
T4003	AE	T4303	AS	±250 ppm	-55 to 175°C
T4004	AF	T4304	AT	±250 ppm	0 to 200°C
T4005	AG	T4305	AU	±250 ppm	-55 to 175°C
T4006	AH	T4306	AV	±250 ppm	0 to 175°C
T4007	AI	T4307	AW	±150 ppm	-55 to 175°C
T4008	AJ	T4308	AX	±150 ppm	0 to 175°C
T4009	AK	T4309	AY	±100 ppm	-55 to 125°C

* See Marking Specification

** Recommended for new designs

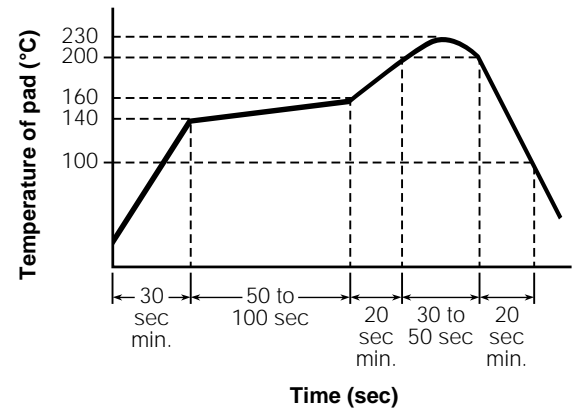

Recommended Reflow Soldering Profile





CRYSTAL OSCILLATORS
 HCMOS/TTL 5V
Surface Mount
 Extended Temperature/COTS
 20 KHz to 100 MHz

SURFACE MOUNT
T package
 T1250, T1254,
 T1256, T1258
 T3250, T3254,
 T3256, T3258
 T4001 thru T4009
 T4301 thru T4309

ELECTRICAL SPECIFICATIONS

Frequency 20 KHz to 100 MHz
Frequency Stability Includes calibration at 25°C, operating temperature, change of input voltage, change of load, shock and vibration.

	MIN	TYP	MAX	UNITS
Input Voltage, V_{DD}	4.5	5.0	5.5	volts
Input Current			40	mA

Output
 All units, full range
 Loads 3 TLL loads, or 10 LSTTL loads, or 15 pf CMOS

Rise and Fall Time, max


TTL and LSTTL from 0.4 to 2.4V	8	ns
CMOS, 15pf, from 0.4 to (V _{DD} -0.4) V	8	ns
CMOS, 30pf, from 0.4 to (V _{DD} -0.4) V	10	ns

Symmetry *

TTL and LSTTL @ 1.4V	40/60	percent
CMOS @50% V _{DD}	40/60	percent

Aging

First year	3	ppm
After first year	1	ppm/yr

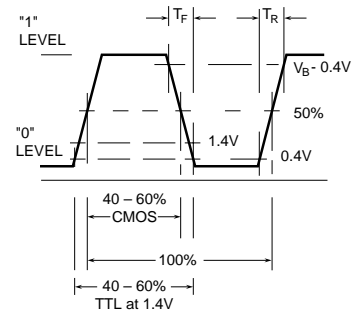


WAVEFORMS



ENVIRONMENTAL SPECIFICATIONS

Shock – 1000 Gs, 0.35 ms, 1/2 sine wave, 3 shocks in each plane
Vibration – 10-2000 Hz of .06" d.a. or 20 Gs, whichever is less
Humidity – Resistant to 85° R.H. at 85°C

* Superior symmetry available on all models.



SUGGESTED PC PADS

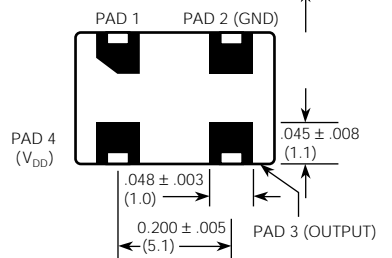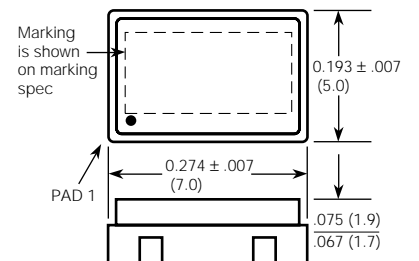

Millimeters are shown in ().

"T" Package

CONNECTIONS

	Fixed Output Models	Tristate Models
PAD 1	NOT USED	Floating or "1": Oscillator runs Ground or "0": Disable or Tristate
PAD 2	Ground and Case	
PAD 3	Output	
PAD 4	+5V, V _{DD}	





CRYSTAL OSCILLATORS
 HCMOS/TTL 5V
Surface Mount
 Extended Temperature/COTS
 20 KHz to 100 MHz


SURFACE MOUNT
T package
 T1250, T1254,
 T1256, T1258
 T3250, T3254,
 T3256, T3258
 T4001 thru T4009
 T4301 thru T4309

MECHANICAL SPECIFICATIONS

- Leak** – MIL STD 883, Method 1014, condition A1
- Case** – Ceramic with glass hermetic seal
- Pads** – 60 microinch of gold over nickel
- Marking** – Epoxy ink or laser engraved
- Resistance to Solvents** – MIL STD 202, Method 215


MARKING SPECIFICATION

The format for the marking is:



HOW TO ORDER

For Part Number, put package type before model number, and add frequency in MHz, for example:

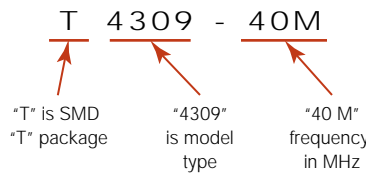

Unless customer-specific terms and conditions are signed by an officer of MF Electronics, the sale of this and all MF Electronics products are subject to terms and conditions set forth at www.mfelectronics.com/terms

SS#	Rev.
T1254	B

