




Specification


Crystal Filter 21.4MHz

P/N: 21M24B50M

Item	Typical
Central Frequency (Fc, MHz)	21.4
Insertion Loss (dB)	5.0
Ripple Within Pass Band (dB)	1.0
Bandwidth with -3dB (kHz)	±12
Bandwidth at -40dB Attenuation (kHz)	±40
Bandwidth at -50dB Attenuation (kHz)	±53
Ultimate Attenuation (dB)	60
I/O Impedance (Ω)	50
I/O VSWR	2.0
Operation Temperature (°C)	-45 ~ +80
Storage Temperature (°C)	-55 ~ +85
Package Size (mm)	30x20x10

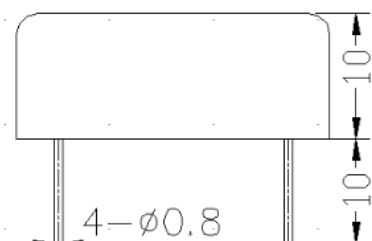

Pin No.	Description
1	Input/Output
2	Output/Input
3,4	Ground

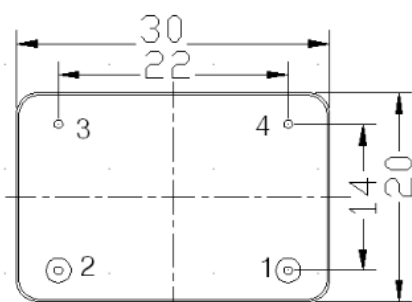

Bottom View

Unit:mm