




Specification

Crystal Filter 70MHz

Part Number: 70M40C51

Item	Typical
Nominal Frequency (MHz, fo)	70
Insertion Loss (dB)	≤5.0
Ripple Within Pass Band (dB)	≤1.5
Bandwidth at -3 dB (kHz)	≥40
Bandwidth at 40 dB Attenuation (kHz)	≤84
Bandwidth at 60 dB Attenuation (kHz)	≤112
Ultimate Rejection (dB)	60
I/O Impedance (Ω)	50
Operation Temperature (°C)	-20 ~ +70
Storage Temperature (°C)	-45 ~ +85
Package Size (mm)	37x16x11

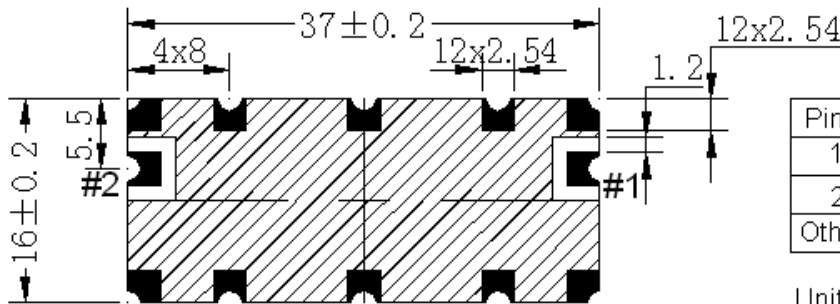

Pin No.	Description
1	Input/Output
2	Output/Input
Others	Ground

Unit:mm

