
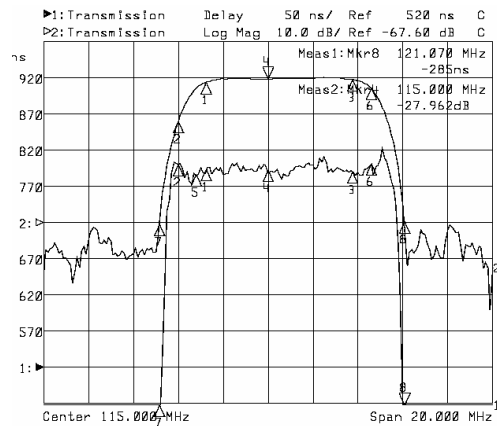





1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz		115	
Insertion Loss	dB		24.0	
112.25MHz	dB		-0.5	-1.0
118.75MHz	dB		-1.2	-1.8
111.00MHz	dB		-12	-15
Passband Variation	dB		1.2	
Group Delay Variation	nsec		60	
Absolute Delay	usec		0.7	
Ultimate Rejection	dB		40	
Substrate Material	-		LiTaO3	
Ambient Temperature	°C		25	

2. Typical Performance

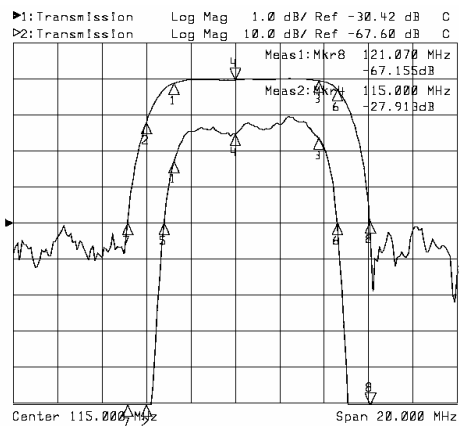

3. Package

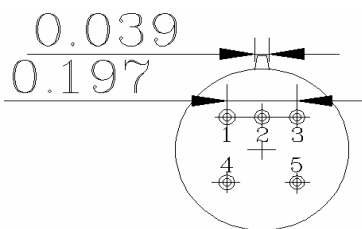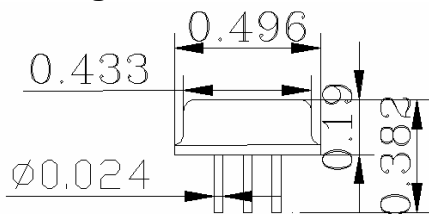

TO-5A IN: 1
OUT: 5
GND: 2,3,4

4. Marking

S115M065