




1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	59.90	60.00	60.10
Insertion Loss at F_0	dB		26.51	27.02
1 dB Bandwidth	MHz	4.31	4.50	
3 dB Bandwidth	MHz	4.70	5.11	
40dB Bandwidth	MHz		7.20	7.50
Passband Variation	dB		0.40	0.70
Group Delay Variation	nsec		20	40
Absolute Delay	usec		1.72	1.80
Ultimate Rejection	dB	48	50	
Substrate Material	-		YZ-LiNbO3	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

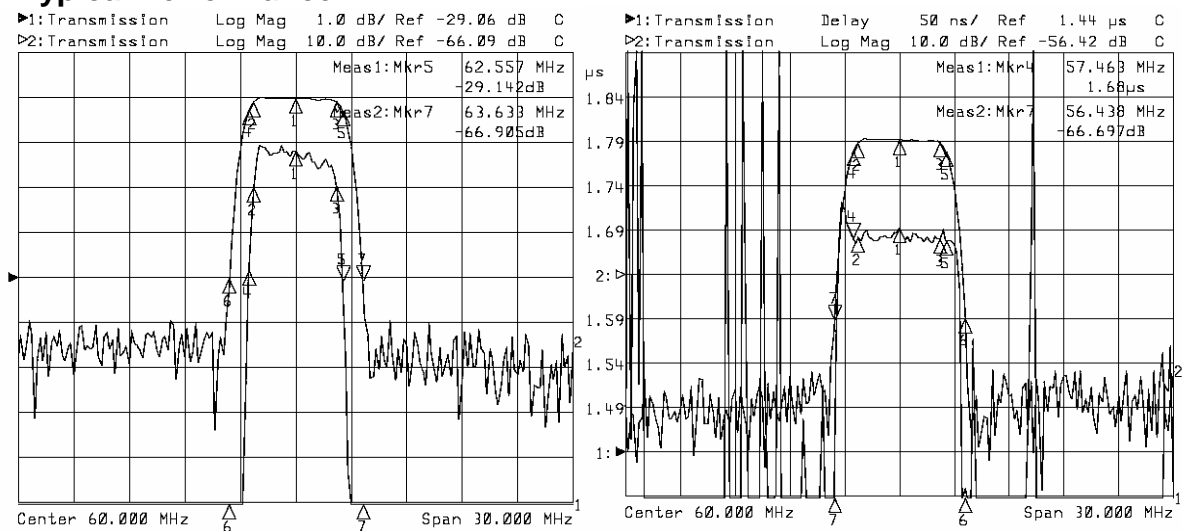

3. Package

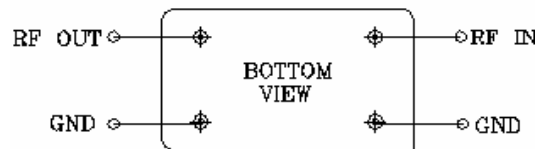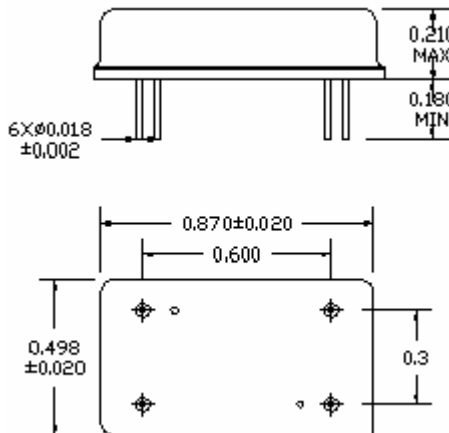

No Matching Required
 Source/Load Impedance=50ohm
 Package Style XI

4. Marking

S060M051