
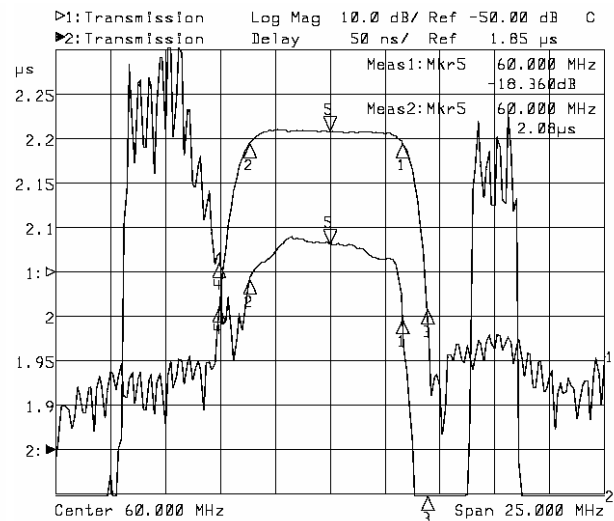




## 1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	59.90	60.00	60.10
Insertion Loss at $F_0$	dB		19.00	19.80
3 dB Bandwidth	MHz	7.10	7.50	
40dB Bandwidth	MHz		9.01	9.52
Passband Variation	dB		0.80	1.00
Group Delay Variation	nsec		70	90
Ultimate Rejection	dB	45	48	
Substrate Material	-		128LiNbO3	
Ambient Temperature	°C	-40	25	80

## 2. Typical Performance

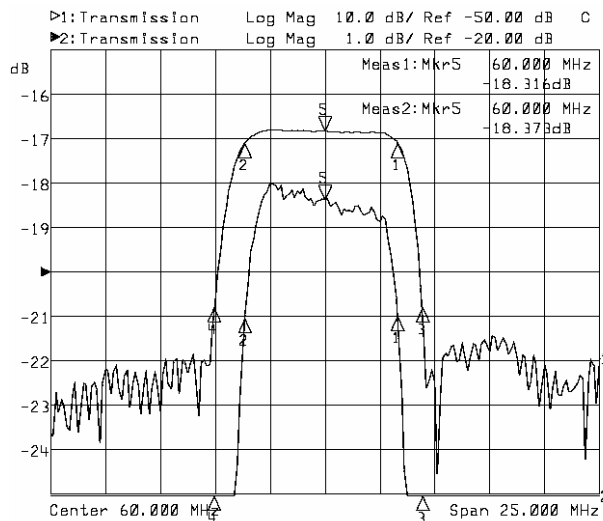

## 3. Package

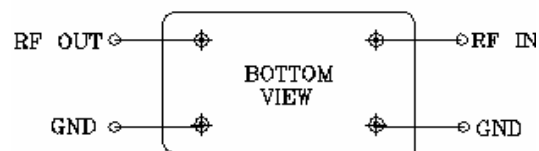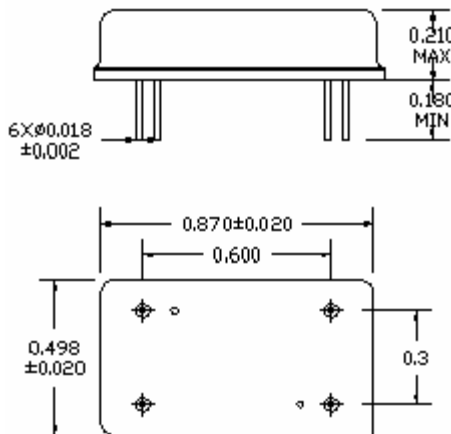

No Matching Required  
Source/Load Impedance=50ohm  
Package Style XI

## 4. Marking

S060M080