





### 1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	69.93	70.00	70.07
Insertion Loss at $F_0$	dB		24.80	26.00
1 dB Bandwidth	MHz	1.20	1.24	
3 dB Bandwidth	MHz	1.45	1.52	
40dB Bandwidth	MHz		2.71	2.80
Passband Variation	dB		0.60	0.90
Group Delay Variation	nsec		100	150
Absolute Delay	usec		2.54	2.56
Ultimate Rejection	dB	50	55	
Substrate Material	-		Quartz	
Ambient Temperature	°C	-40	25	80

### 2. Typical Performance

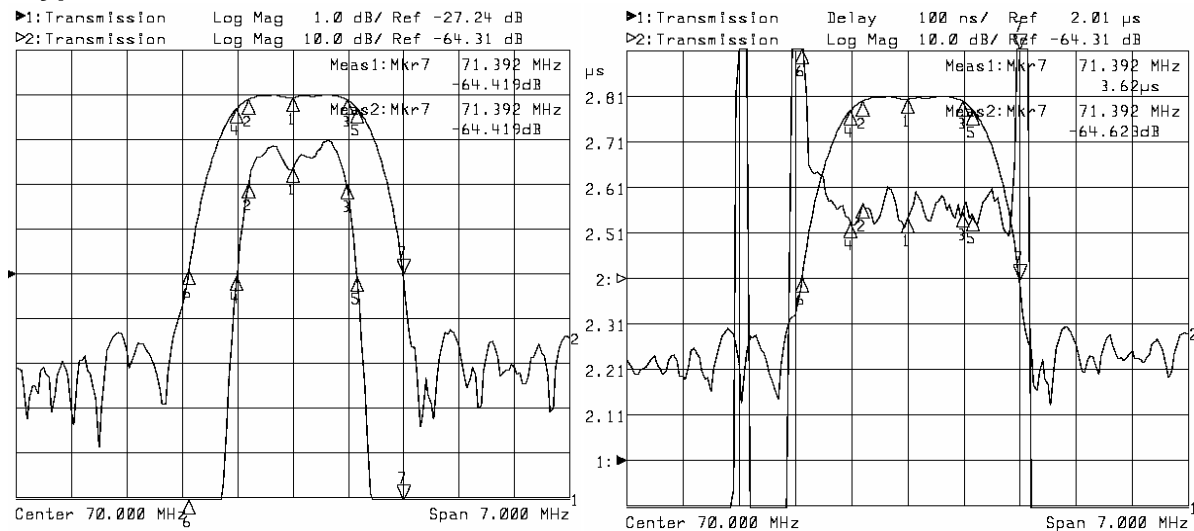

### 3. Package

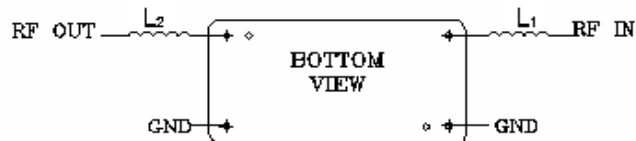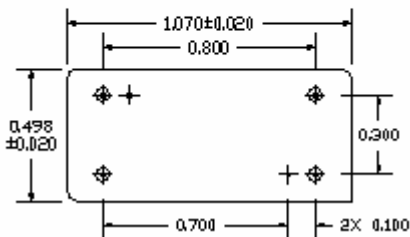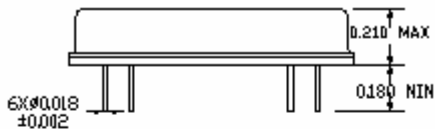

$L_1$ : 270nH

$L_2$ : 330nH

Source/Load Impedance=50ohm  
Package Style X0

### 4. Marking

S070M015