
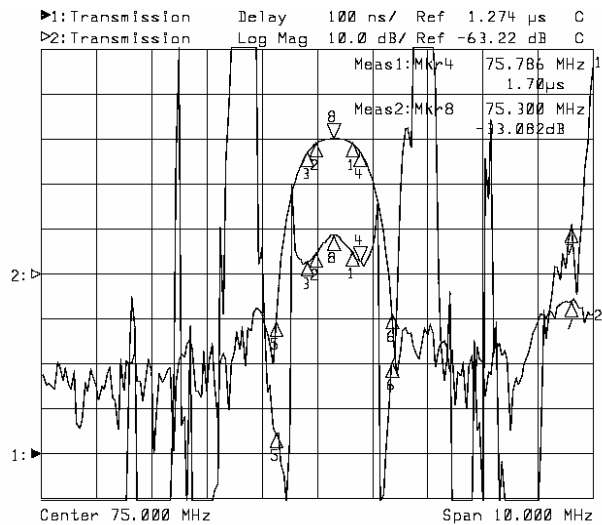



### 1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	75.265	75.275	75.285
Insertion Loss at F <sub>0</sub>	dB		33.50	34.20
1 dB Bandwidth	MHz	0.62	0.64	
3 dB Bandwidth	MHz	0.91	0.95	
40dB Bandwidth	MHz		2.08	2.10
Passband Variation	dB		0.40	0.60
Group Delay Variation	nsec		70	90
Absolute Delay	usec		1.76	1.78
Ultimate Rejection	dB	36	38	
Substrate Material	-		Quartz	
Ambient Temperature	°C	-40	25	80

### 2. Typical Performance

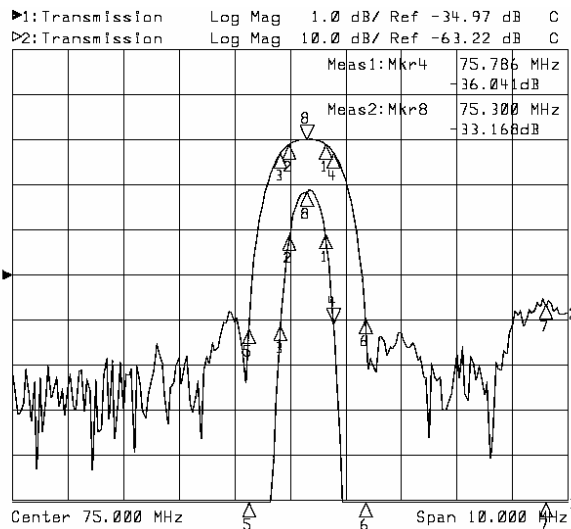

### 3. Package

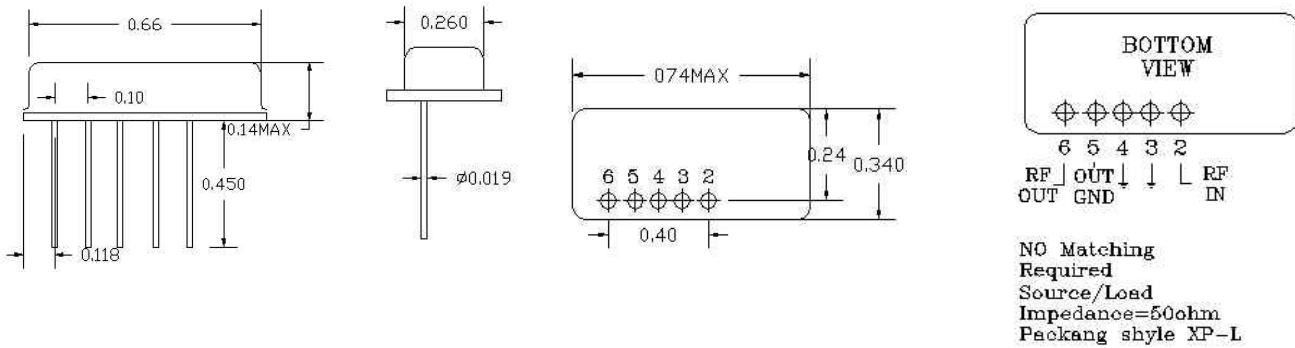

### 4. Marking

S075M010