



## 1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	74.90	75.00	75.10
Insertion Loss at F <sub>0</sub>	dB		2.91	3.00
1 dB Bandwidth	MHz	0.93	0.95	
3 dB Bandwidth	MHz	1.64	1.67	
Passband Variation	dB		0.20	0.40
Group Delay Variation	nsec		80	100
Absolute Delay	usec		0.55	
Ultimate Rejection	dB	28	30	
Substrate Material	-		128LiNbO3	
Ambient Temperature	°C	-40	25	80

## 2. Typical Performance

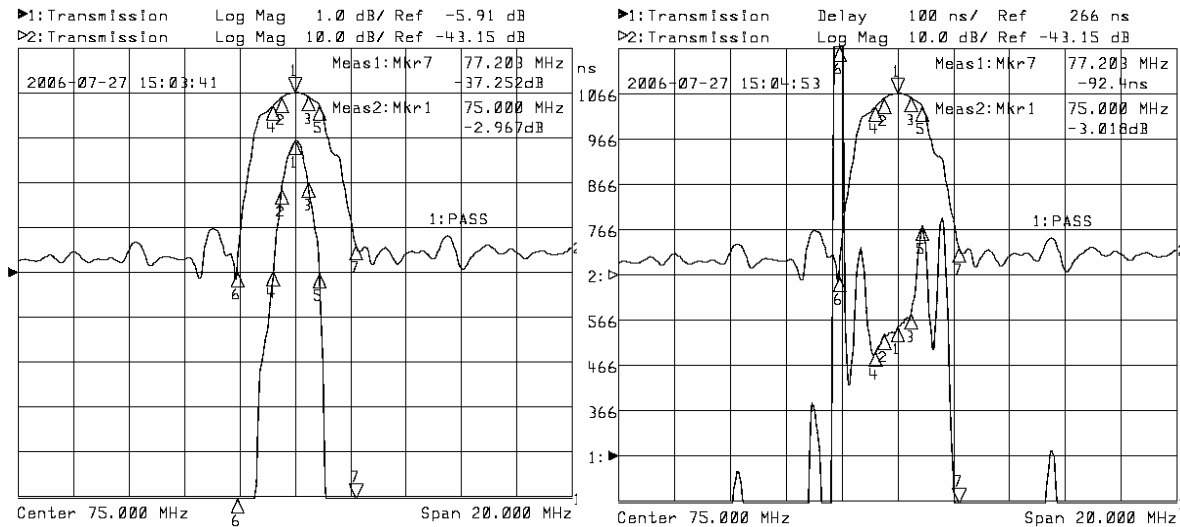

## 3. Package

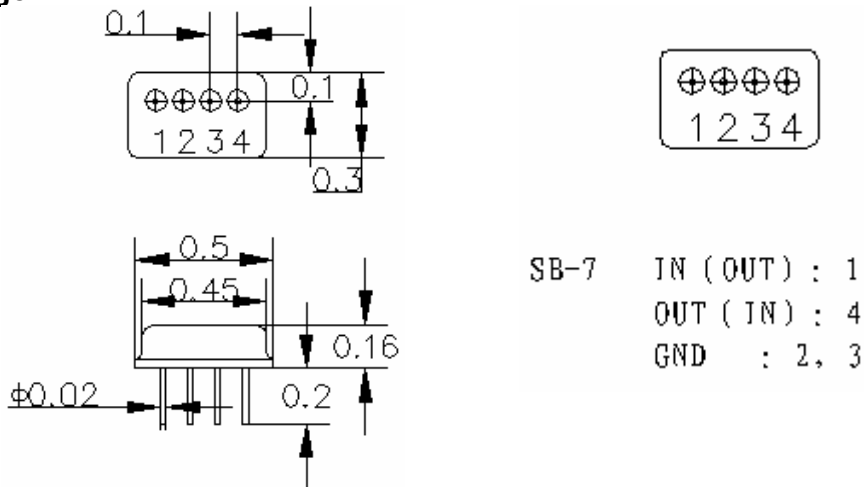

## 4. Marking

S075M016L