
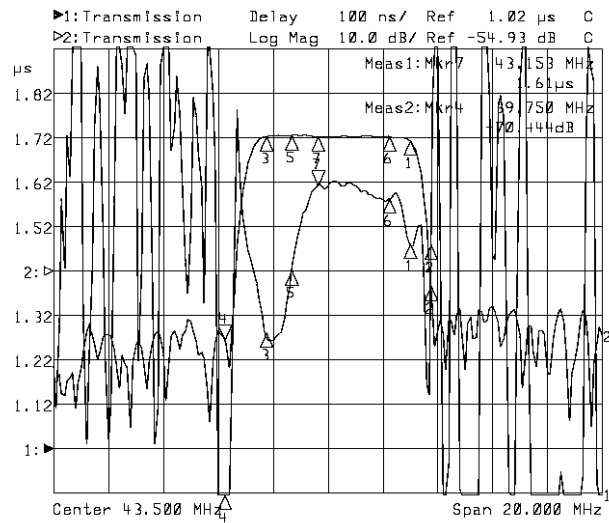




1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	43.40	43.50	43.60
Insertion Loss at 45.55MHz	dB		22.30	23.00
41.25MHz	dB		-0.50	0.00
46.5MHz	dB		-2.00	-2.50
47.25MHz	dB		-38.00	-40.00
Passband Variation	dB		0.60	0.80
Group Delay@41.57MHz	nsec		-330	-370
Group Delay@42.17MHz	nsec		-130	-180
TTS	dB		48	50
Ultimate Rejection	dB	37	40	
Substrate Material	-		128LiNbO3	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

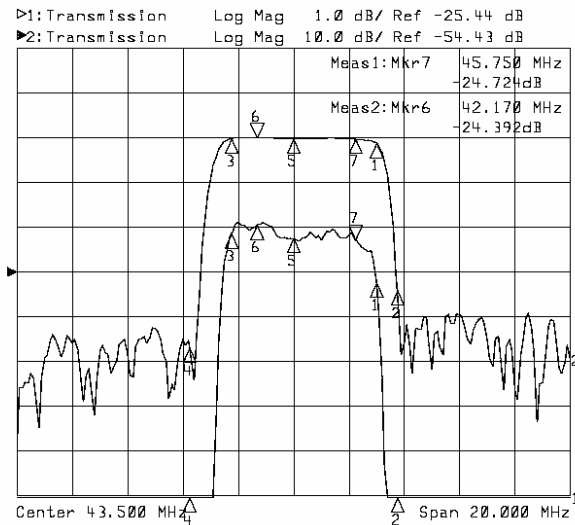

3. Package

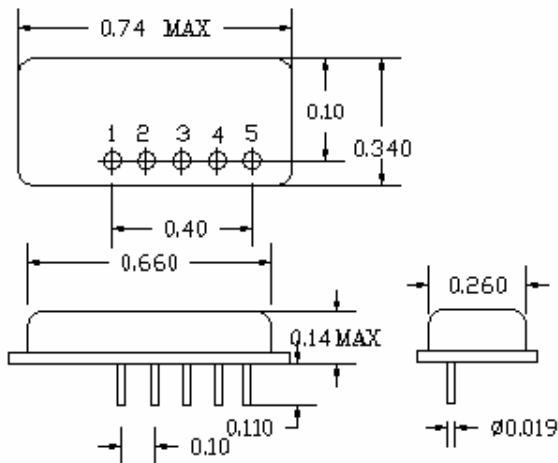

No Matching
 Required
 Source/Load
 Impedance=50ohm
 Package Style YP

4. Marking

WMVF-13