
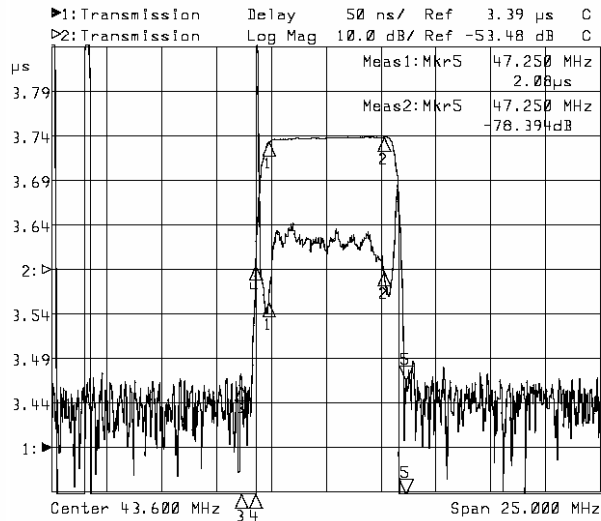




### 1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	43.50	43.60	43.70
Insertion Loss at F <sub>0</sub>	dB		25.00	26.00
@41.00MHz	dB	-1.10	-1.20	
@46.25MHz	dB	-0.10	-0.20	
@40.40MHz	dB		-30.00	-31.20
@47.25MHz	dB		-50.00	-51.60
Passband Variation	dB		0.60	0.80
Group Delay Variation	nsec		100	120
Absolute Delay	usec		3.52	3.55
Ultimate Rejection	dB	52	55	
Substrate Material	-		YZ-LiNbO3	
Ambient Temperature	°C	-40	25	80

### 2. Typical Performance

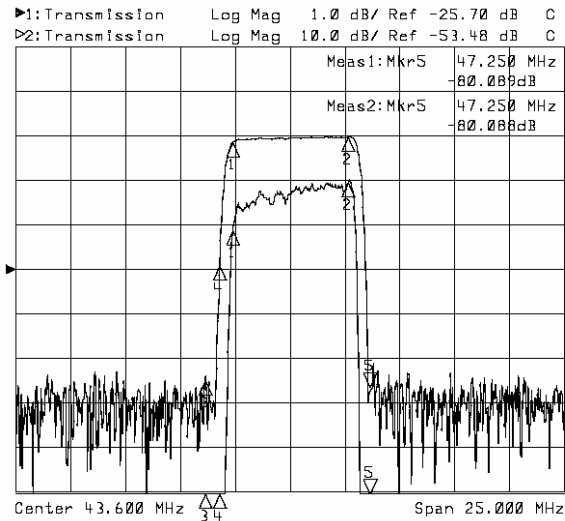

### 3. Package

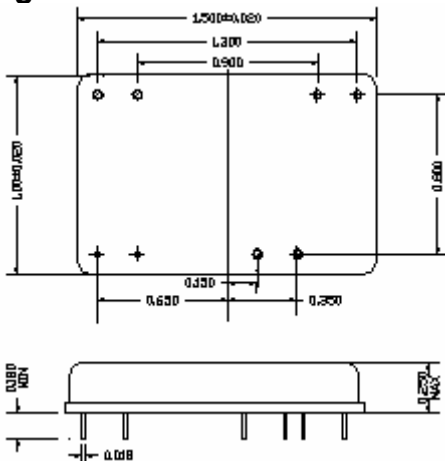

No Matching Required  
Source/Load Impedance=50ohm  
Package Style YS

### 4. Marking

WMVF-17