





1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	55.90	56.00	56.10
Insertion Loss at F ₀	dB		17.00	17.20
3 dB Bandwidth	MHz	1.12	1.15	
40dB Bandwidth	MHz		2.45	2.52
Passband Variation	dB		0.80	1.00
Group Delay Variation	nsec		300	420
Absolute Delay	usec		1.80	1.82
Ultimate Rejection	dB	45	48	
Substrate Material	-		LiTaO3	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

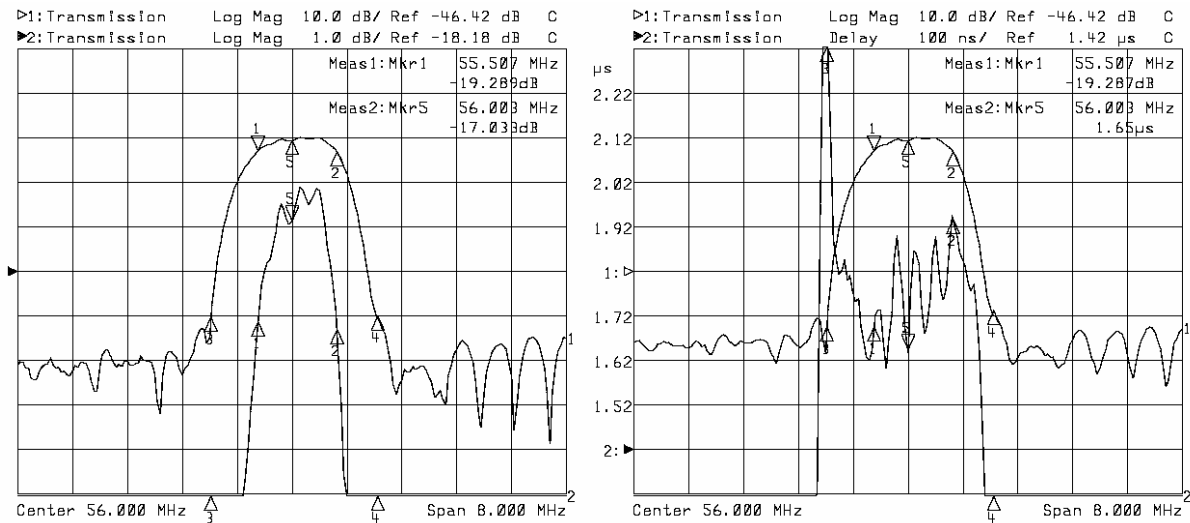

3. Package

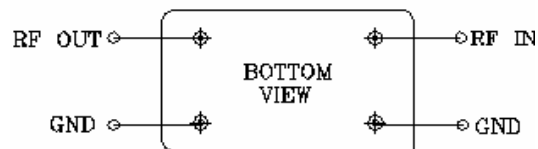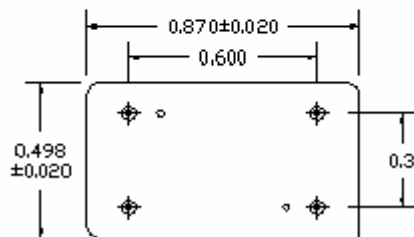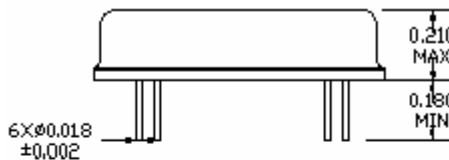

No Matching Required
Source/Load Impedance=50ohm
Package Style XI

4. Marking

S056M011