
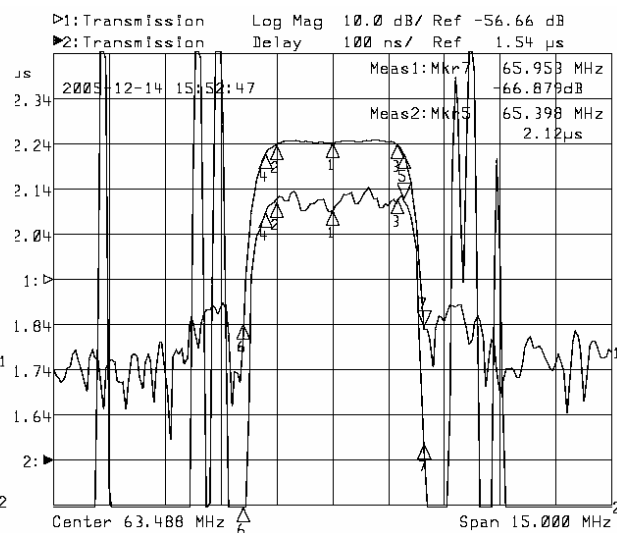




1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	63.288	63.488	63.688
Insertion Loss at F ₀	dB		26.30	28.00
1 dB Bandwidth	MHz	3.00	3.20	
3 dB Bandwidth	MHz	3.60	3.70	
40dB Bandwidth	MHz		4.80	4.90
Passband Variation	dB		0.80	1.00
Group Delay Variation	nsec		70	100
Absolute Delay	usec		2.09	2.12
Ultimate Rejection	dB	33	35	
Substrate Material	-		112LiTaO ₃	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

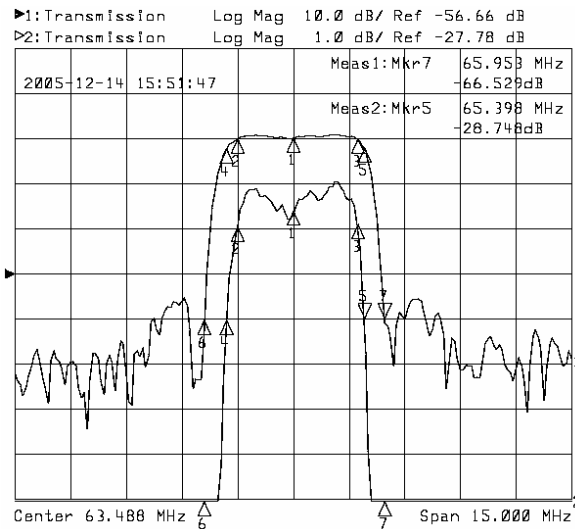

3. Package

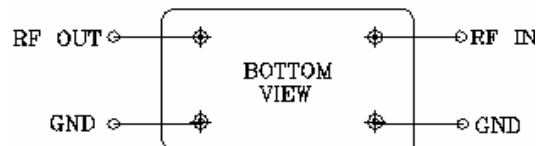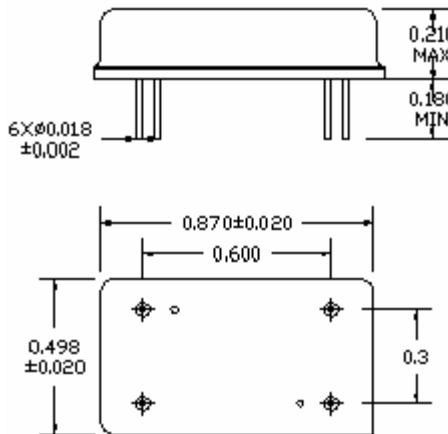

No Matching Required
 Source/Load Impedance=50ohm
 Package Style XI

4. Marking

S063M037