



1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	63.65	63.75	63.85
Insertion Loss at F ₀	dB		23.75	24.65
1 dB Bandwidth	MHz	7.25	7.32	
3 dB Bandwidth	MHz	8.02	8.25	
40dB Bandwidth	MHz		12.85	12.94
Passband Variation	dB		0.80	1.00
Group Delay Variation	nsec		50	70
Absolute Delay	usec		1.32	1.35
Ultimate Rejection	dB	42	45	
Substrate Material	-		128LiNbO3	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

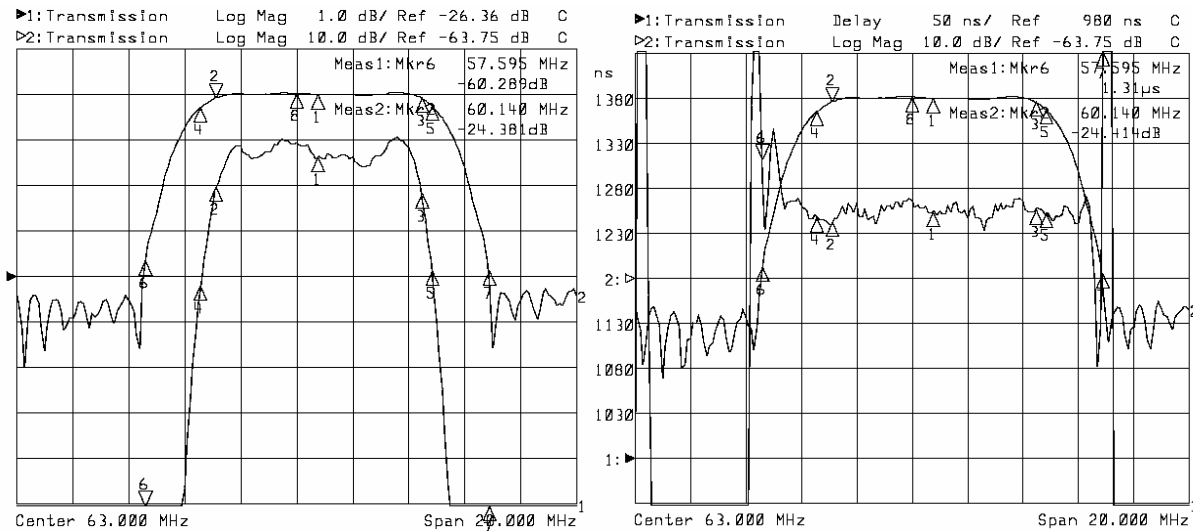

3. Package

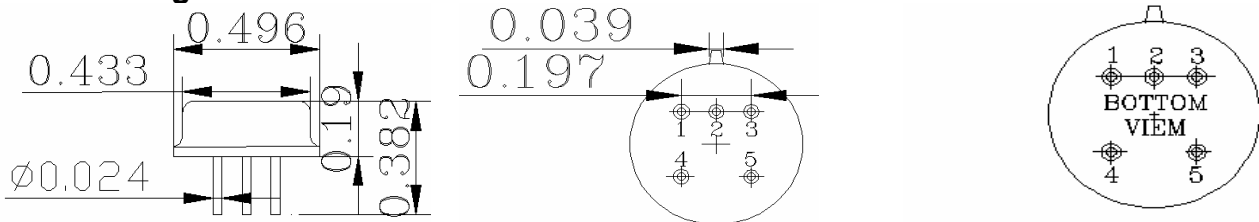

TO-5A IN: 1
OUT: 5
GND: 2,3,4

4. Marking

S063M080