
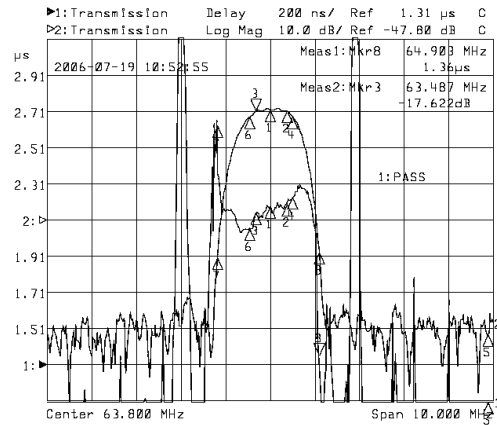




1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	63.76	63.86	63.96
Insertion Loss at F ₀	dB		17.20	17.45
1 dB Bandwidth	MHz	0.67	0.69	
3 dB Bandwidth	MHz	0.94	0.96	
40dB Bandwidth	MHz		2.29	2.34
Passband Variation	dB		0.70	0.80
Group Delay Variation	nsec		170	200
Absolute Delay	usec		2.18	
Ultimate Rejection	dB	52	54	
Substrate Material	-		112-LiTaO3	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

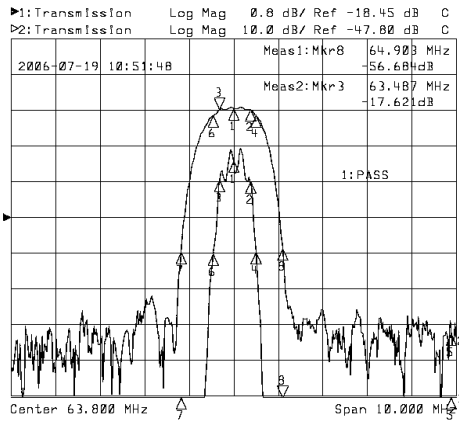

3. Package

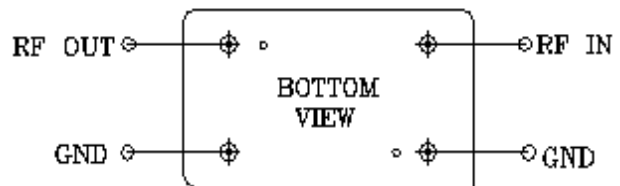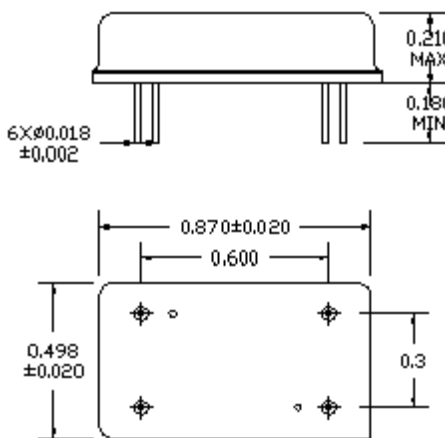

No Matching Required
 Source/Load Impedance=50ohm
 Package Style XI

4. Marking

S064M010