
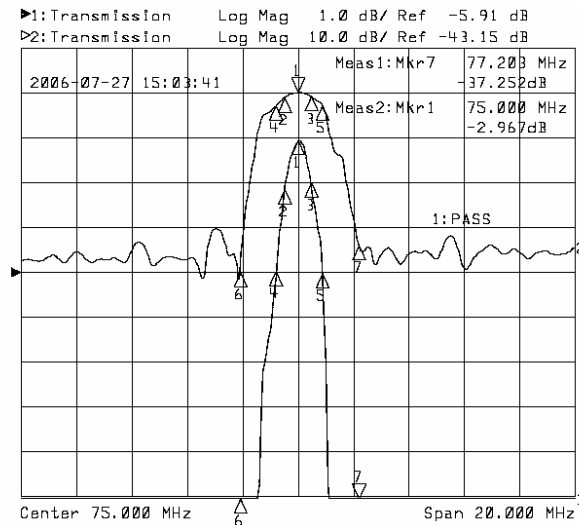




1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	74.90	75.00	75.10
Insertion Loss at F ₀	dB		2.91	3.00
1 dB Bandwidth	MHz	0.93	0.95	
3 dB Bandwidth	MHz	1.64	1.67	
Passband Variation	dB		0.20	0.40
Group Delay Variation	nsec		80	100
Absolute Delay	usec		0.55	
Ultimate Rejection	dB	28	30	
Substrate Material	-		128LiNbO3	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

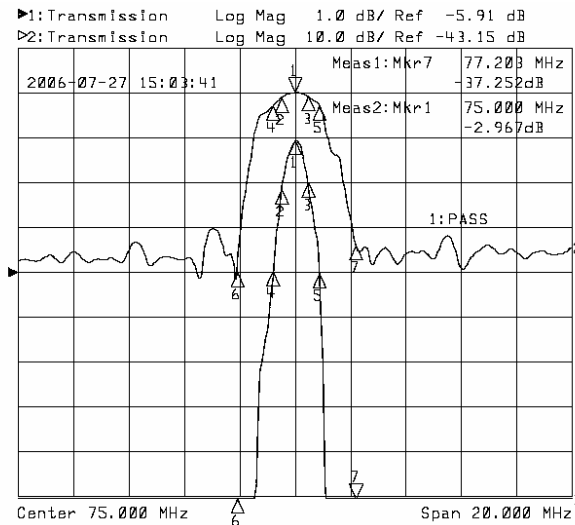

3. Package

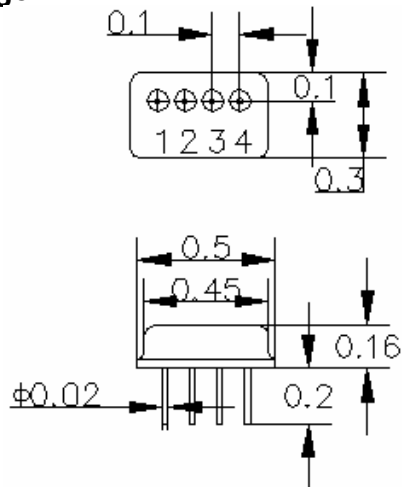

SB-7 IN (OUT) : 1
OUT (IN) : 4
GND : 2, 3

4. Marking

S075M016L