
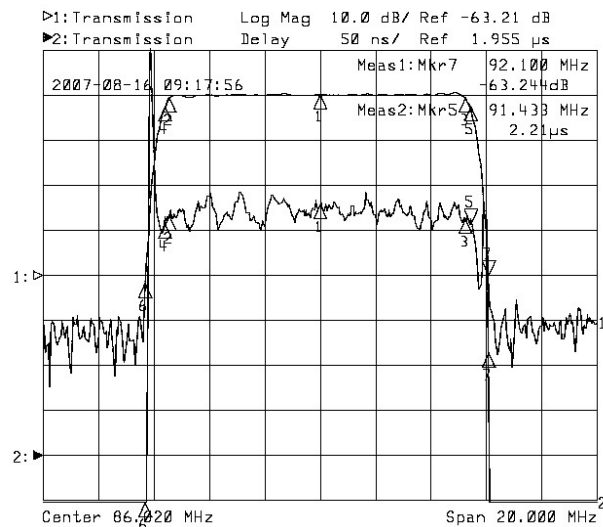





## 1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	85.87	86.02	86.17
Insertion Loss at $F_0$	dB		23.00	24.50
1 dB Bandwidth	MHz	10.50	10.70	
3 dB Bandwidth	MHz	10.80	11.00	
40dB Bandwidth	MHz		12.30	12.50
Passband Variation	dB		0.80	1.20
Group Delay Variation	nsec		40	50
Absolute Delay	usec		2.22	
Ultimate Rejection	dB	40	45	
Substrate Material	-		YZ-LiNbO3	
Ambient Temperature	°C	-40	25	80

## 2. Typical Performance

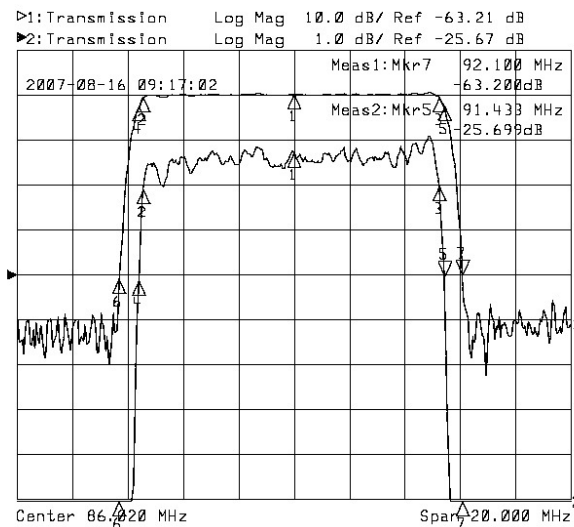

## 3. Package

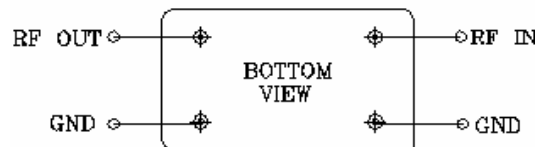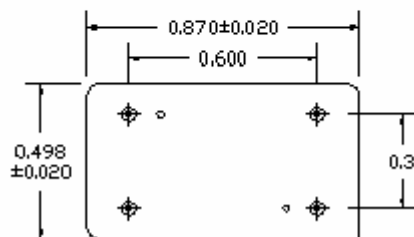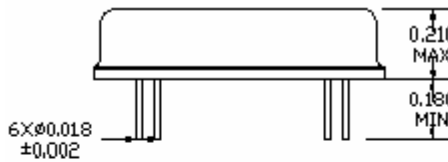

No Matching Required  
 Source/Load Impedance=50ohm  
 Package Style XI

## 4. Marking

S086M110