
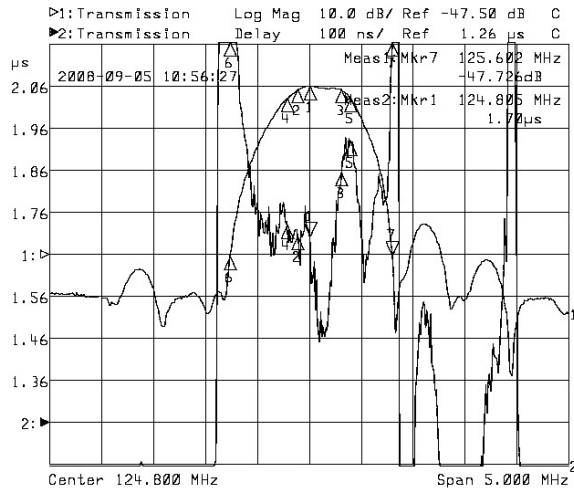




1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	123.75	124.8	123.85
Insertion Loss at F ₀	dB		7.40	8.20
1 dB Bandwidth	MHz	0.35	0.45	
3 dB Bandwidth	MHz	0.60	0.70	
40dB Bandwidth	MHz		1.55	1.65
Passband Variation	dB		0.50	1.00
Group Delay Variation	nsec		400	
Absolute Delay	usec		1.70	
Ultimate Rejection	dB	32	35	
Substrate Material	-		Quartz	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

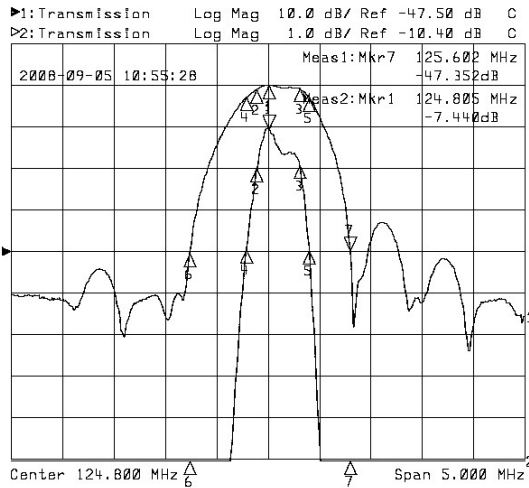

3. Package

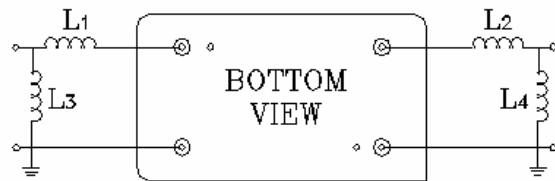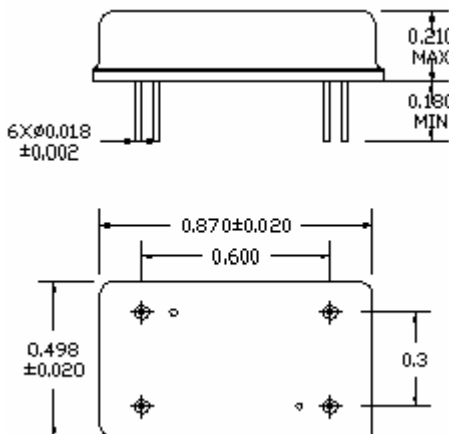

L1:120nH L2:120nH
L3:22nH L4:22nH

Package Style XI

4. Marking

S124M005L