





1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	149.90	150.00	150.10
Insertion Loss at F ₀	dB		22.61	22.96
1 dB Bandwidth	MHz	0.23	0.25	
3 dB Bandwidth	MHz	0.35	0.38	
40dB Bandwidth	MHz		1.30	1.32
Passband Variation	dB		0.50	0.70
Group Delay Variation	nsec		300	400
Absolute Delay	usec		2.81	2.82
Ultimate Rejection	dB	45	48	
Substrate Material	-		Quartz	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

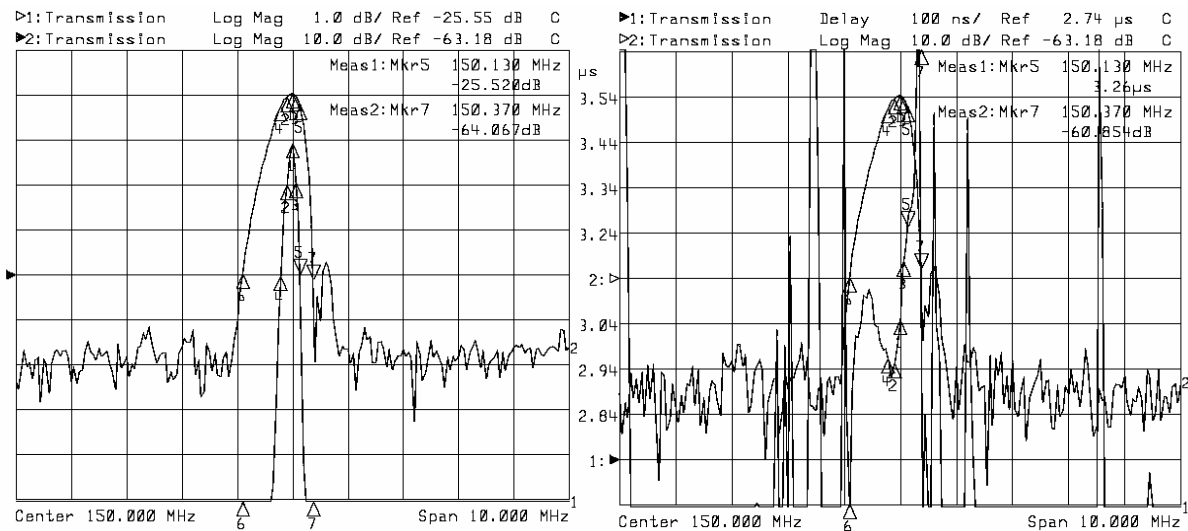

3. Package

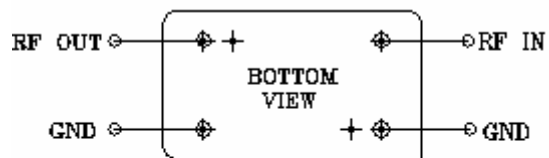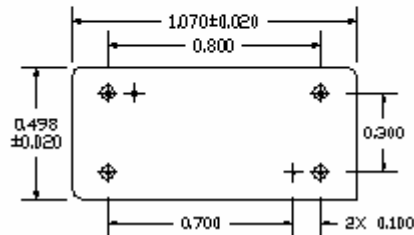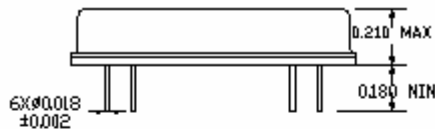

No Matching Required
Source/Load Impedance=50ohm
Package Style X0

4. Marking

S150M003