
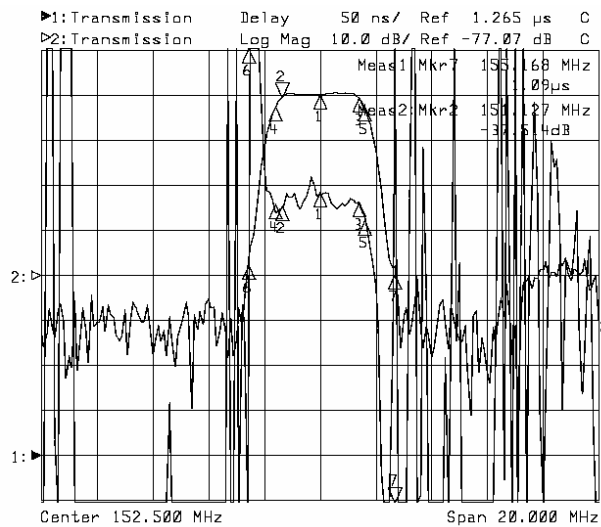




1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	152.40	152.50	152.60
Insertion Loss	dB		37.00	37.86
1dB Bandwidth	dB	2.65	2.76	
3dB Bandwidth	dB	3.02	3.20	
40dB Bandwidth	dB		5.24	5.52
Passband Variation	dB		0.50	0.70
Group Delay Variation	nsec		50	70
Absolute Delay	usec		0.80	1.00
Ultimate Rejection	dB	38	40	
Substrate Material	-		Quartz	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

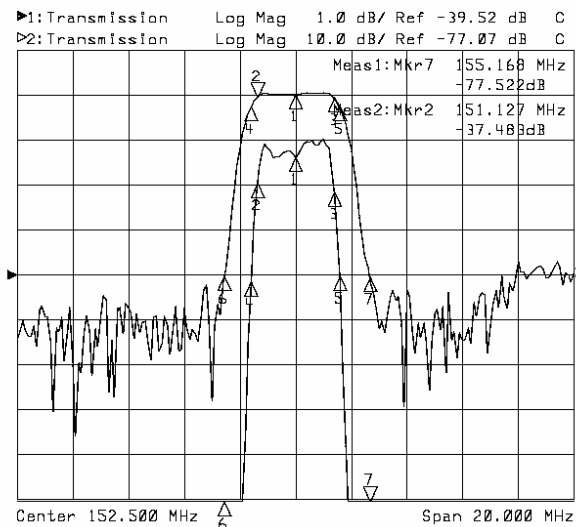

3. Package

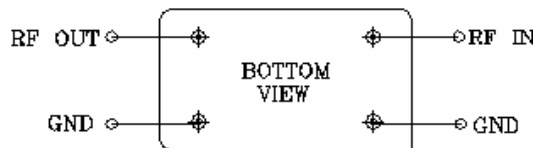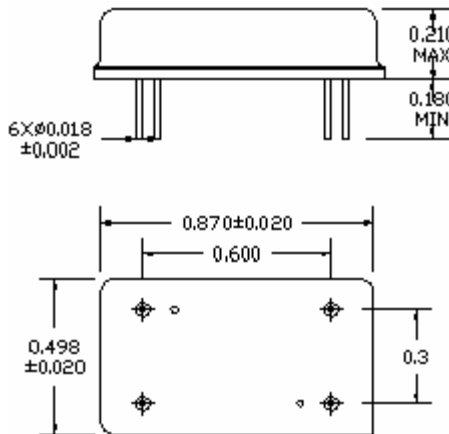

No Matching Required
 Source/Load Impedance=50ohm
 Package Style XI

4. Marking

S152M030