
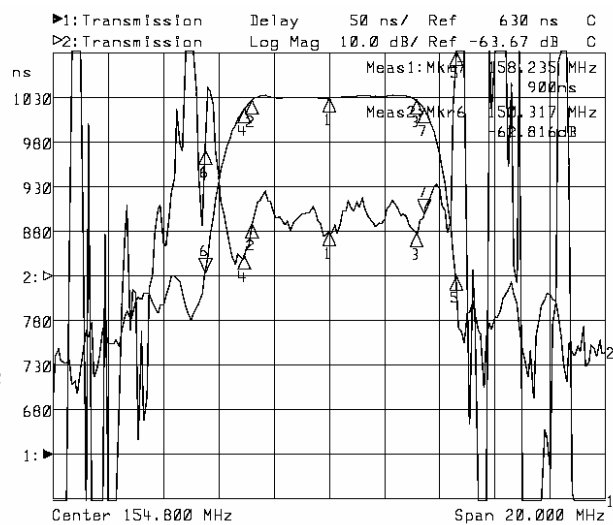




## 1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	154.80	155.00	155.20
Insertion Loss	dB		24.02	24.85
1dB Bandwidth	dB	5.63	5.92	
3dB Bandwidth	dB	6.12	6.50	
40dB Bandwidth	dB		9.05	9.34
Passband Variation	dB		0.70	1.00
Group Delay Variation	nsec		50	80
Absolute Delay	usec		0.90	0.92
Ultimate Rejection	dB	38	40	
Substrate Material	-		LiTao3	
Ambient Temperature	°C	-40	25	80

## 2. Typical Performance

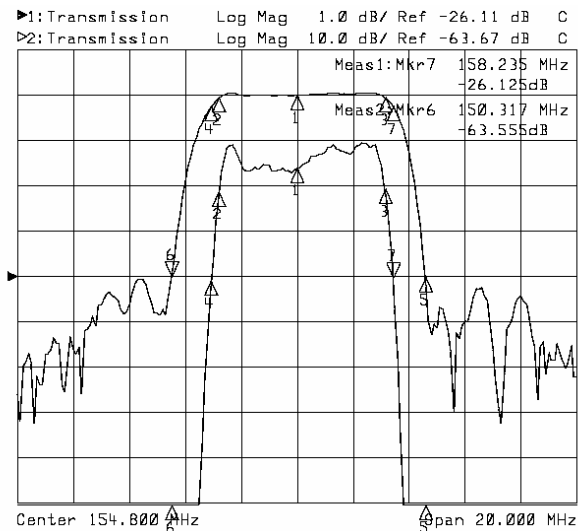

## 3. Package

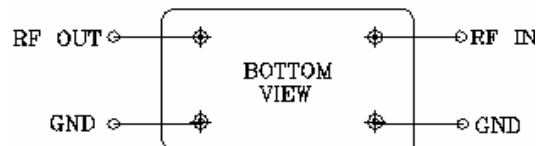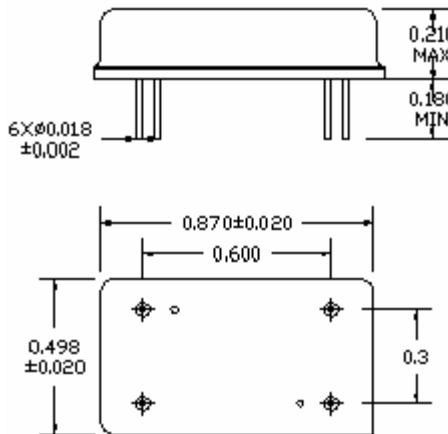

No Matching Required  
 Source/Load Impedance=50ohm  
 Package Style XI

## 4. Marking

S155M065