




1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	179.40	179.50	179.60
Insertion Loss	dB		24.01	24.75
176.25MHz	dB		-0.50	-1.00
182.75MHz	dB		-1.01	-1.50
175.00MHz	dB		-12.1	-15.04
Passband Variation	dB		1.20	1.40
Group Delay Variation	nsec		60	80
Absolute Delay	usec		0.71	0.72
Ultimate Rejection	dB	38	40	
Substrate Material	-		LiTaO3	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

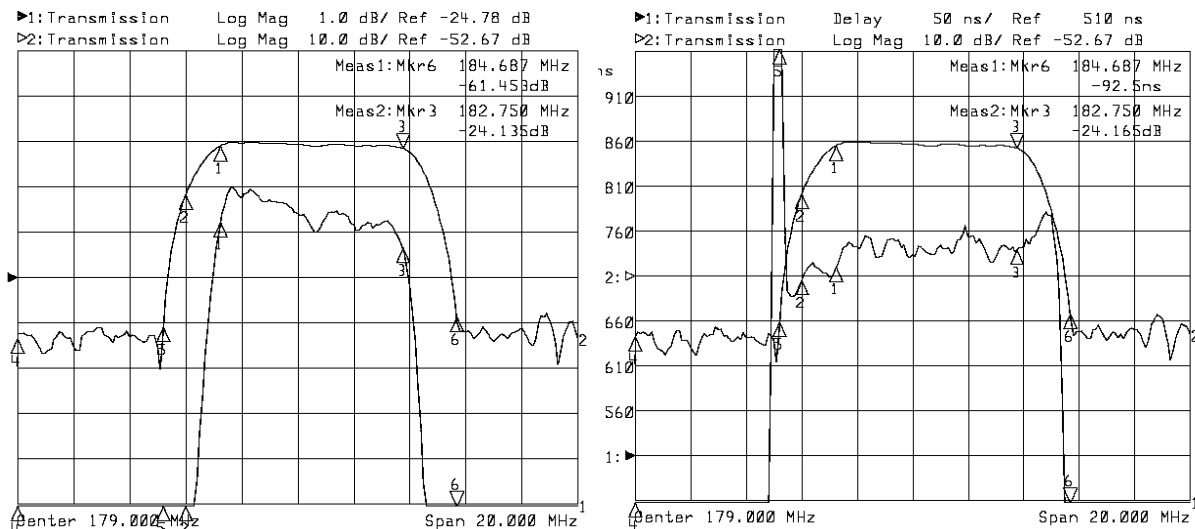

3. Package

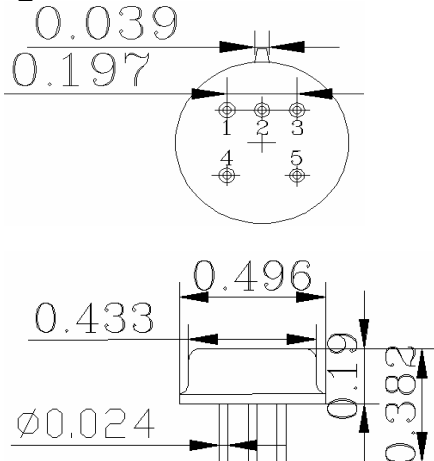

TO-5A IN: 1
 OUT: 5
 GND: 2, 3, 4

4. Marking

S180M070