
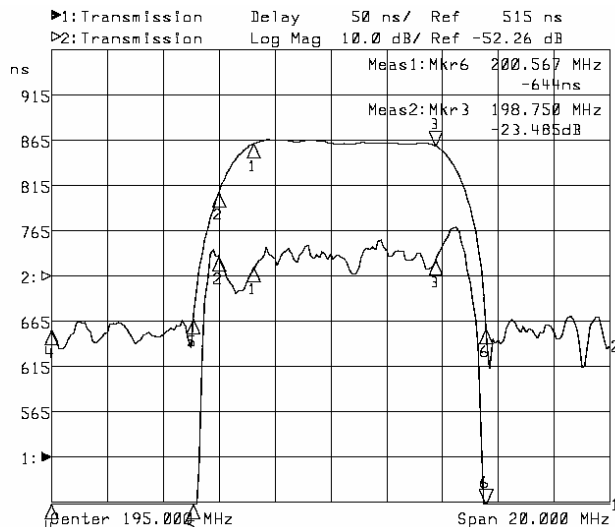




### 1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	195.40	195.50	195.60
Insertion Loss	dB		23.00	23.51
192.25MHz	dB		-0.50	-1.00
198.75MHz	dB		-1.00	-1.50
191.00MHz	dB		-12.00	-14.00
Passband Variation	dB		1.20	1.40
Group Delay Variation	nsec		60	80
Absolute Delay	usec		0.70	0.72
Ultimate Rejection	dB	38	40	
Substrate Material	-		LiTaO3	
Ambient Temperature	°C	-40	25	80

### 2. Typical Performance

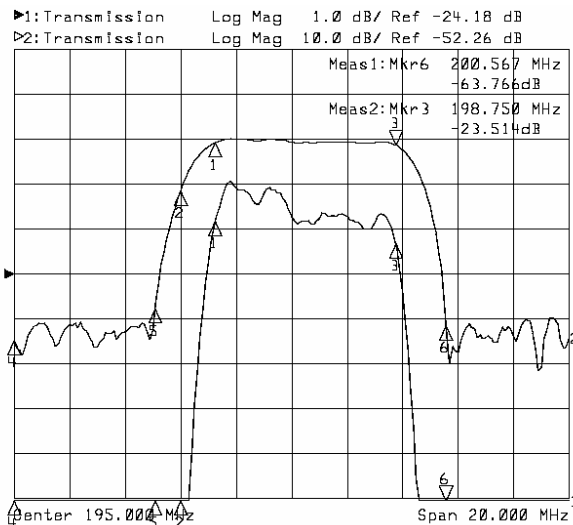

### 3. Package

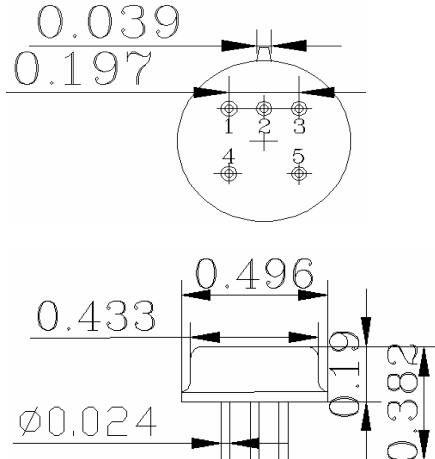

TO-5A IN: 1  
OUT: 5  
GND: 2,3,4

### 4. Marking

S196M070