



1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	199.90	200.00	200.10
Insertion Loss at F ₀	dB		3.22	3.40
1 dB Bandwidth	MHz	3.12	3.13	
3 dB Bandwidth	MHz	5.00	5.08	
40dB Bandwidth	MHz		12.61	12.67
Passband Variation	dB		0.20	0.40
Group Delay Variation	nsec		80	100
Absolute Delay	usec		0.16	
Ultimate Rejection	dB	22	25	
Substrate Material	-		128LiNbO3	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

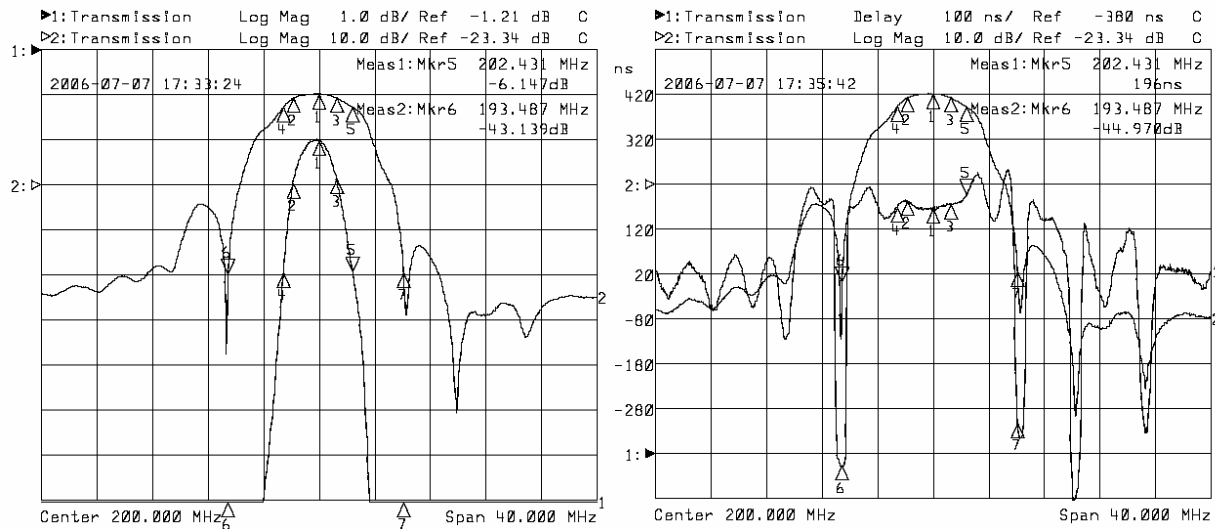

3. Package

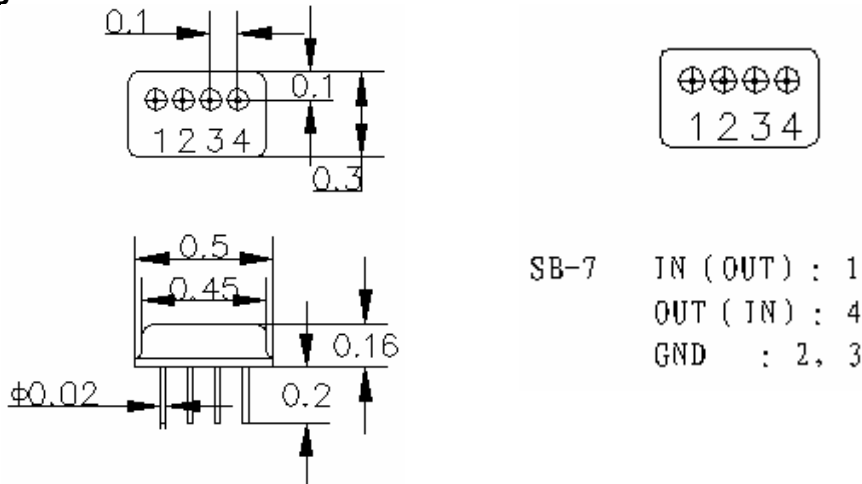

4. Marking

S200M032L