
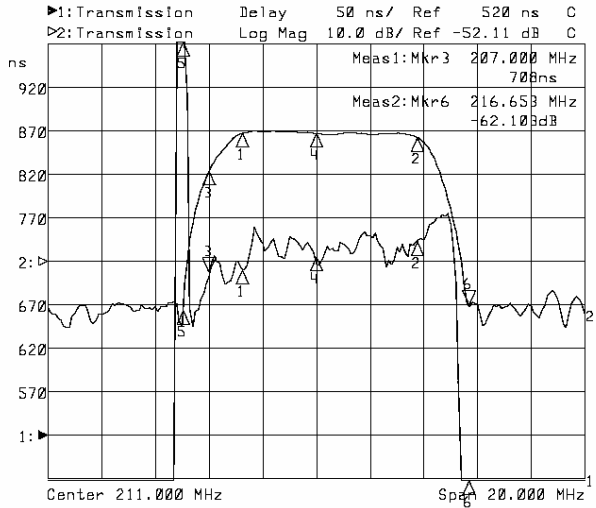




1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	211.40	211.50	211.60
Insertion Loss	dB		23.02	24.00
208.25MHz	dB		-0.56	-1.00
214.75MHz	dB		-1.04	-1.51
207.00MHz	dB		-10.05	-12.02
Passband Variation	dB		1.20	1.40
Group Delay Variation	nsec		60	120
Absolute Delay	usec		0.70	0.71
Ultimate Rejection	dB	38	40	
Substrate Material	-		LiTaO3	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

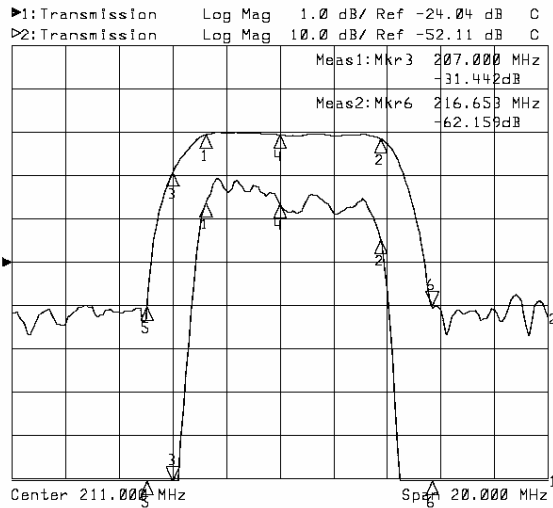

3. Package

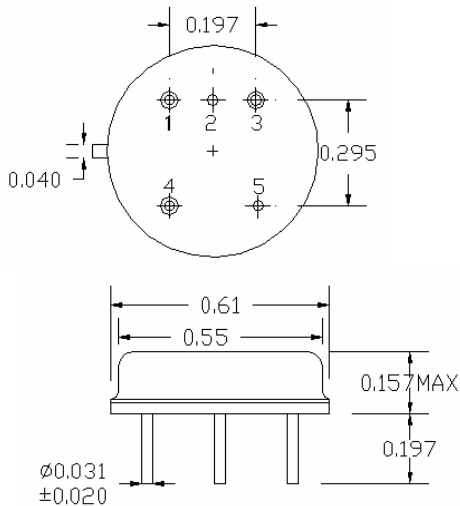

SFA02
IN: 4
OUT: 3
GND: 1,2,5

4. Marking

S212M070