





1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	259.90	260.00	260.10
Insertion Loss at F_0 (without match)	dB		35.00	36.00
1 dB Bandwidth	MHz	3.00	3.15	
12 dB Bandwidth	MHz		5.20	5.60
25 dB Bandwidth	MHz		6.00	6.2
40 dB Bandwidth	MHz		6.90	7.10
Passband Variation	dB		0.80	1.00
Group Delay Variation	nsec		50	
Absolute Delay	usec		1.01	
Ultimate Rejection	dB		40	
Substrate Material	-		Quartz	
Ambient Temperature	°C	-10	25	+85

2. Typical Performance

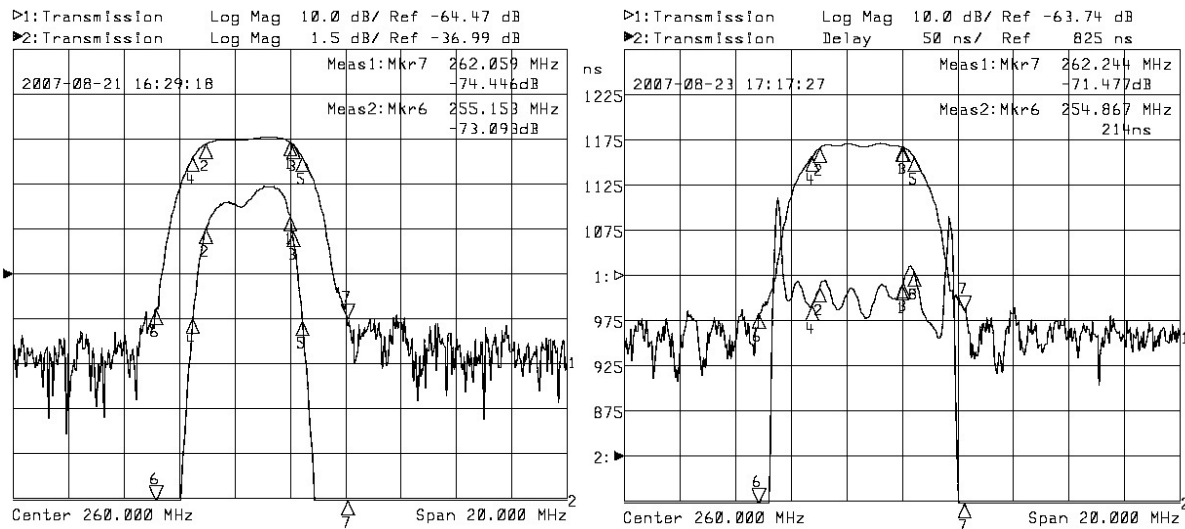

3. Package

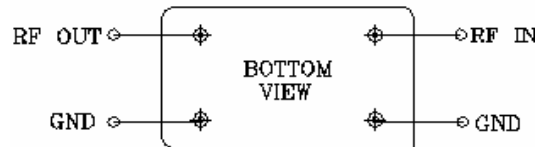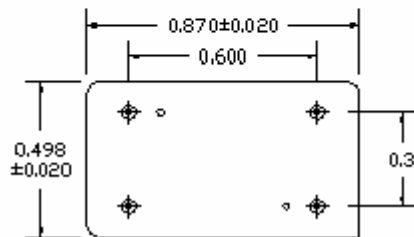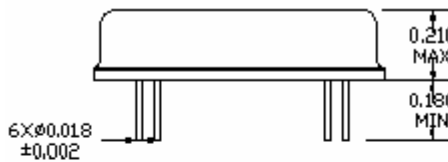

No Matching Required
Source/Load Impedance=50ohm
Package Style XI

4. Marking

S260M035