
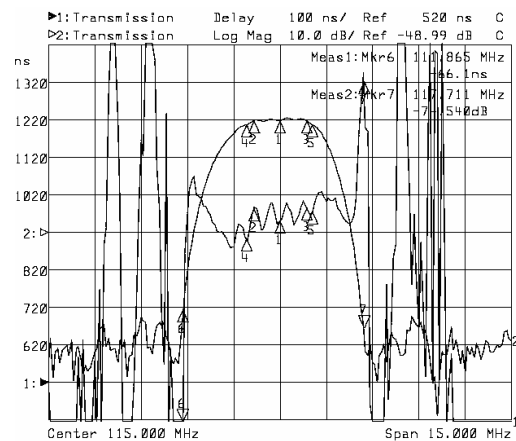





## 1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	114.9	115.0	115.1
Insertion Loss at F <sub>0</sub>	dB		19.5	
1 dB Bandwidth	MHz		1.72	
2 dB Bandwidth	MHz		2.14	
50dB Bandwidth	MHz		5.84	
Passband Variation	dB		0.8	
Phase Linearity	Deg			
Group Delay Variation	nsec		100	
Absolute Delay	usec		0.9	
Ultimate Rejection	dB		55	
Substrate Material	-		LiTao3	
Ambient Temperature	°C		25	

## 2. Typical Performance

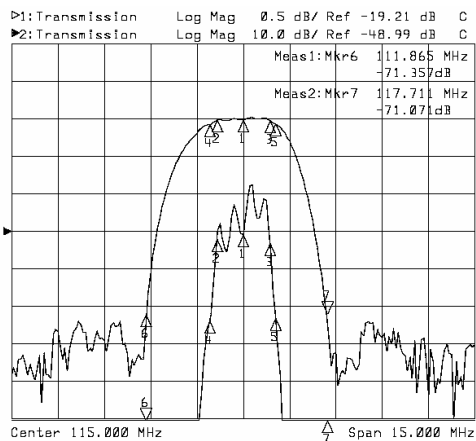

## 3. Package

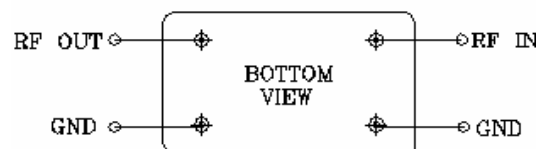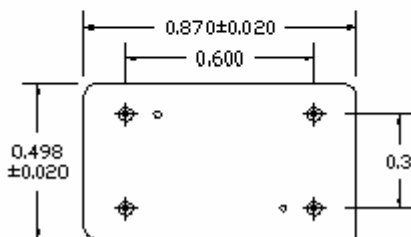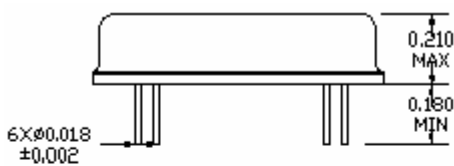

No Matching Required  
 Source/Load Impedance=50ohm  
 Package Style XI

## 4. Marking

S115M025