
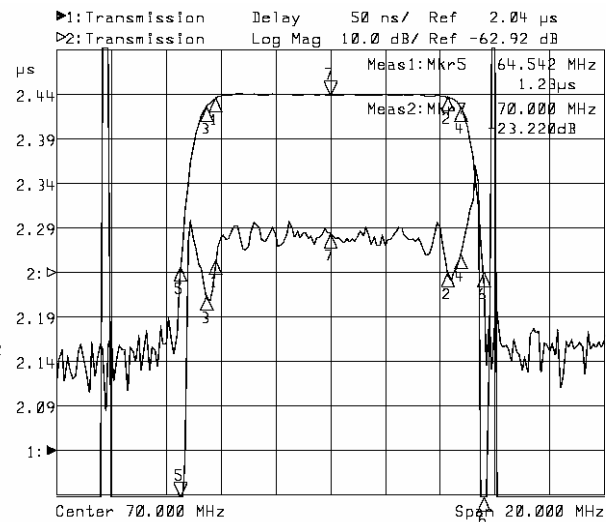





## 1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	69.90	70.00	70.10
Insertion Loss at $F_0$	dB		26.50	27.50
1 dB Bandwidth	MHz	8.20	8.70	
3 dB Bandwidth	MHz	9.00	9.28	
40dB Bandwidth	MHz		11.16	11.50
Passband Variation	dB		0.60	0.80
Group Delay Variation	nsec		40	60
Absolute Delay	usec		2.30	2.35
Ultimate Rejection	dB	50	52	
Substrate Material	-		YZ LiNbO <sub>3</sub>	
Ambient Temperature	°C	-40	25	80

## 2. Typical Performance

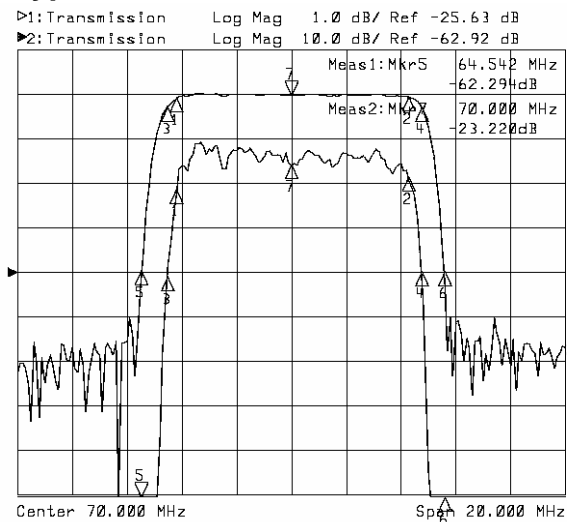

## 3. Package

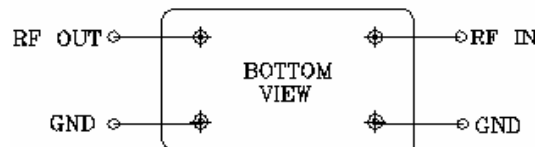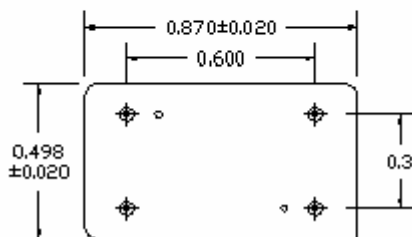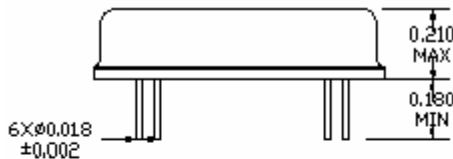

No Matching Required  
 Source/Load Impedance=50ohm  
 Package Style XI

## 4. Marking

S070M092