
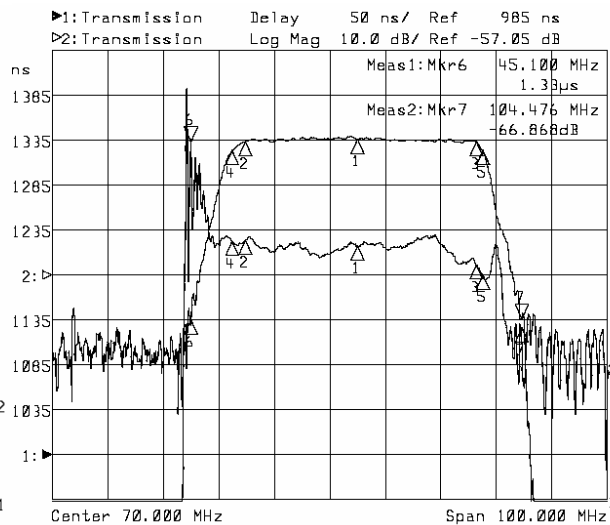





1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	74.70	75.00	75.30
Insertion Loss at F_0	dB		26.50	27.50
1 dB Bandwidth	MHz	41.00	41.60	
3 dB Bandwidth	MHz	45.00	45.40	
40dB Bandwidth	MHz		59.50	59.90
Passband Variation	dB		0.90	1.00
Group Delay Variation	nsec		40	50
Absolute Delay	usec		1.22	1.23
Ultimate Rejection	dB	40	45	
Substrate Material	-		128LiNbO3	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

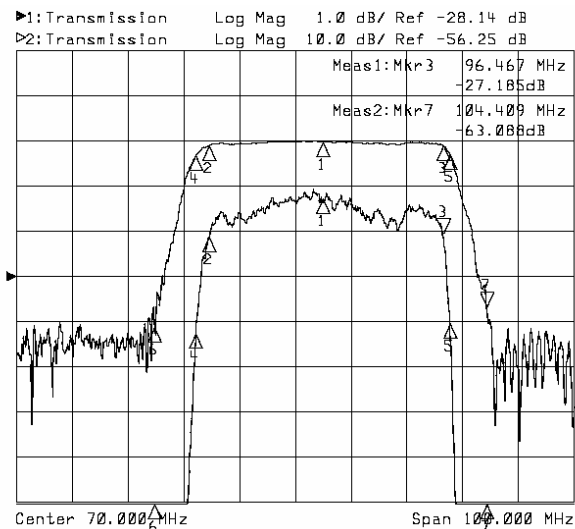

3. Package

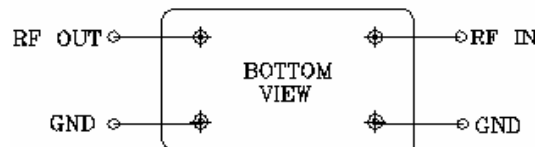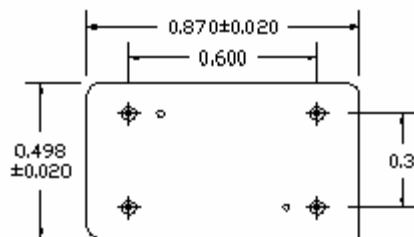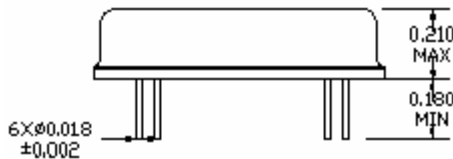

No Matching Required
Source/Load Impedance=50ohm
Package Style XI

4. Marking

S075M450