





1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	24.95	25.00	25.05
Insertion Loss at F ₀	dB		7.80	8.00
1 dB Bandwidth	MHz	0.20	0.38	
3 dB Bandwidth	MHz	0.35	0.50	
50dB Bandwidth	MHz		1.55	1.70
Passband Variation	dB		0.50	0.60
Group Delay Variation	nsec		150	180
Absolute Delay	usec		2.00	2.06
Ultimate Rejection	dB	70	80	
Substrate Material	-		128LiNbO3	
Ambient Temperature	°C	-40	25	85

2. Typical Performance

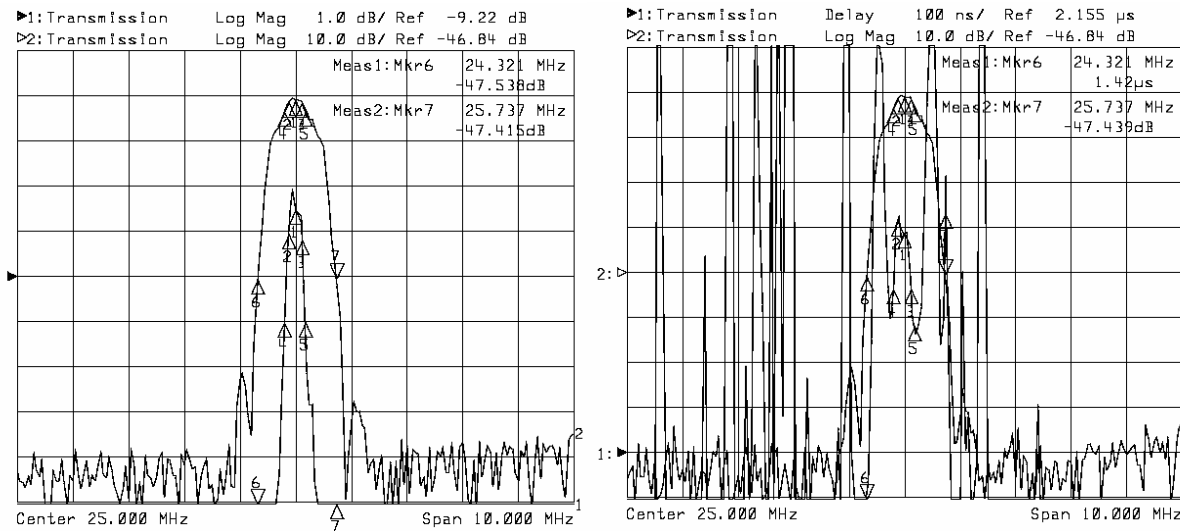

3. Package

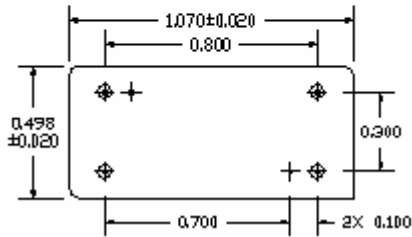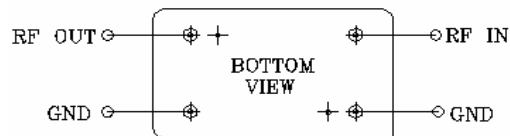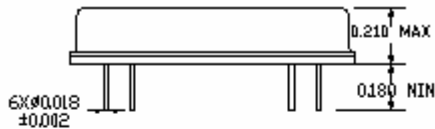

No Matching Required
Source/Load Impedance=50ohm
Package Style X0

4. Marking

S025M005L