





1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	25.90	26.00	26.10
Insertion Loss at F_0	dB		36.00	37.20
1 dB Bandwidth	MHz	7.15	7.28	
3 dB Bandwidth	MHz	7.65	7.82	
40dB Bandwidth	MHz		9.86	9.95
Passband Variation	dB		1.00	1.20
Group Delay Variation	nsec		20	40
Absolute Delay	usec		3.15	3.18
Ultimate Rejection	dB	40	45	
Substrate Material	-		LiNbO3	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

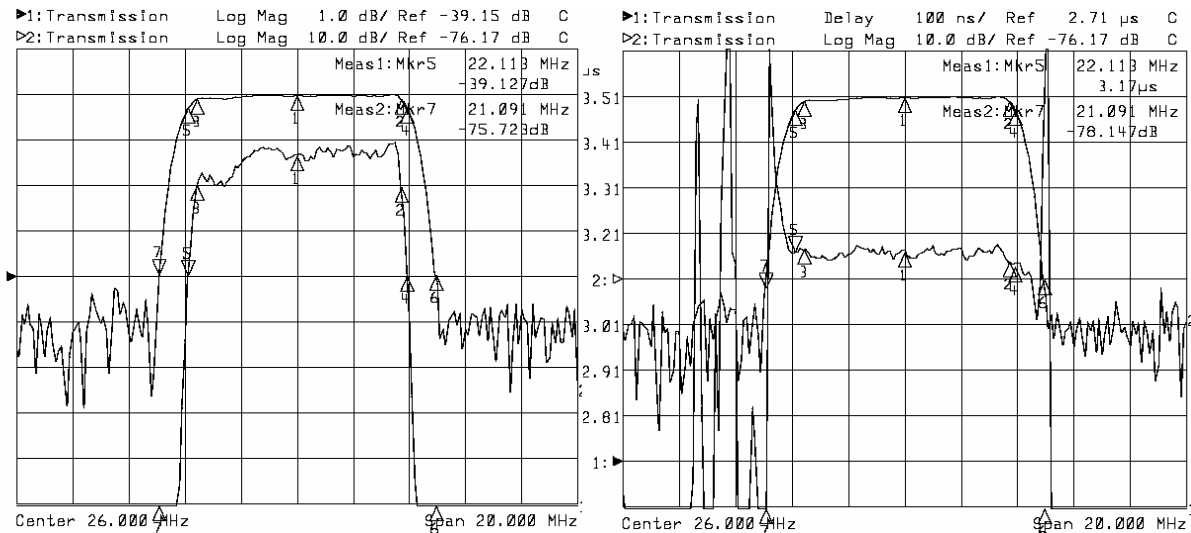

3. Package

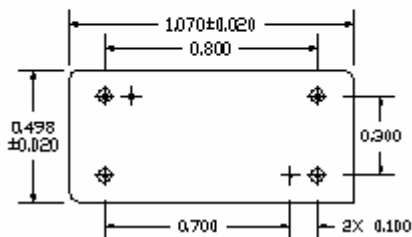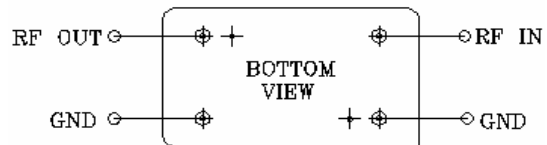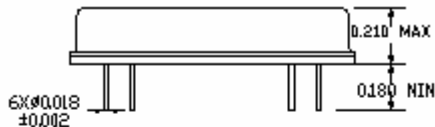

No Matching Required
Source/Load Impedance=50ohm
Package Style XO

4. Marking

S026M080