



1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	60.90	61.00	61.10
Insertion Loss	dB		24.00	25.00
57.75MHz	dB	-0.48	-0.50	
64.25MHz	dB		-0.50	-1.00
56.25MHz	dB		-25.01	-28.02
Passband Variation	dB		0.50	0.70
Group Delay Variation	nsec		40	70
Absolute Delay	usec		1.51	1.52
Ultimate Rejection	dB	48	50	
Substrate Material	-		128-LiNbO3	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

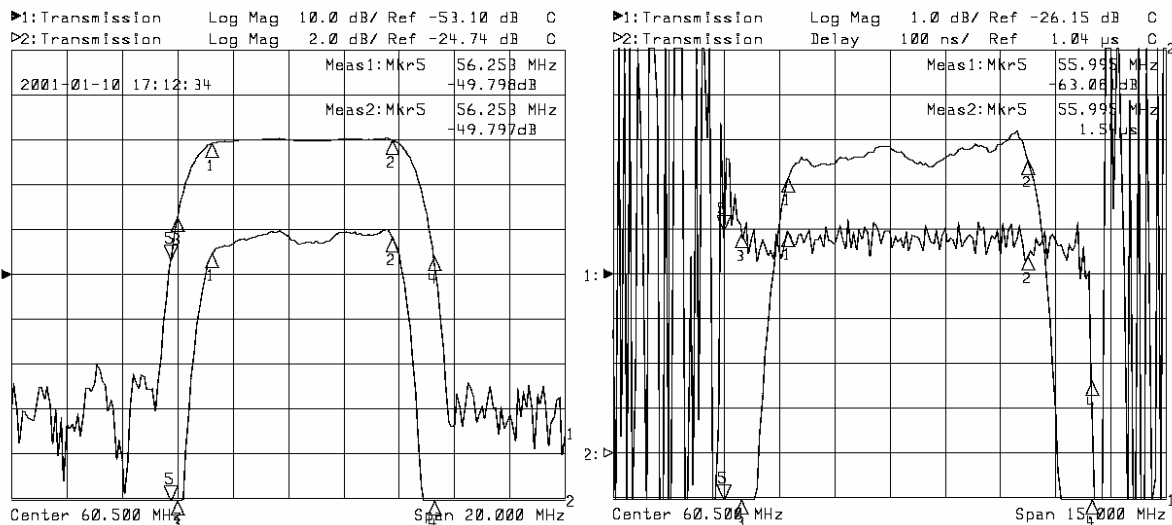

3. Package

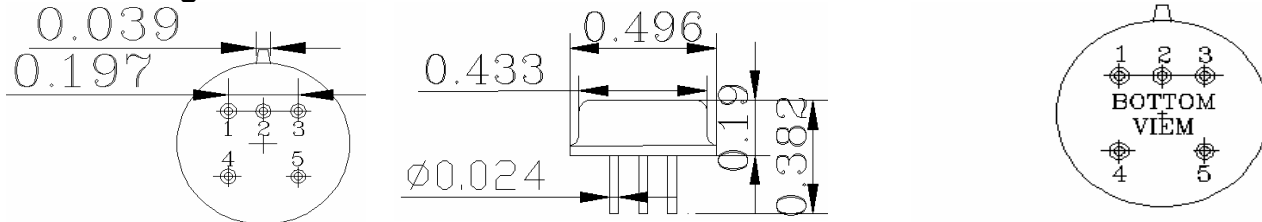

TO-5A IN: 1
OUT: 5
GND: 2,3,4

4. Marking

S061M070