
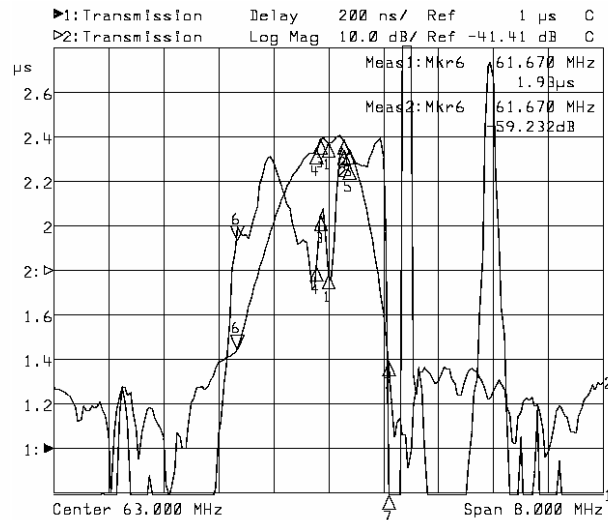





1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	62.90	63.00	63.10
Insertion Loss at F ₀	dB		12.00	12.50
3 dB Bandwidth	MHz	0.39	0.40	
40dB Bandwidth	MHz		2.40	2.42
Passband Variation	dB		1.50	1.70
Group Delay Variation	nsec		300	400
Ultimate Rejection	dB	48	50	
Substrate Material	-		LiTaO ₃	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

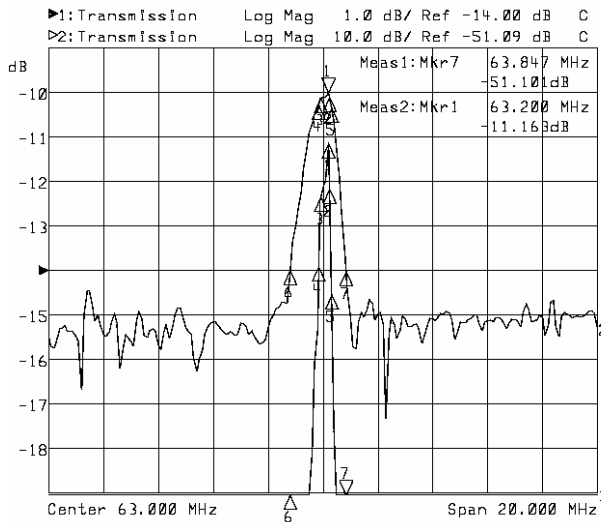

3. Package

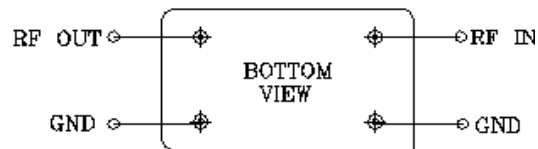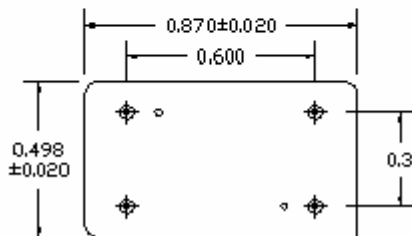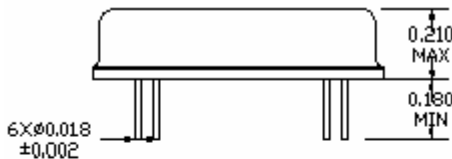

No Matching Required
Source/Load Impedance=50ohm
Package Style XI

4. Marking

S063M004