





1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	62.90	63.00	63.10
Insertion Loss at F ₀	dB		28.50	29.20
1 dB Bandwidth	MHz	0.25	0.28	
3 dB Bandwidth	MHz	0.45	0.49	
40dB Bandwidth	MHz		1.68	1.72
Passband Variation	dB		0.20	0.30
Group Delay Variation	nsec		150	170
Ultimate Rejection	dB	52	55	
Substrate Material	-		Quartz	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

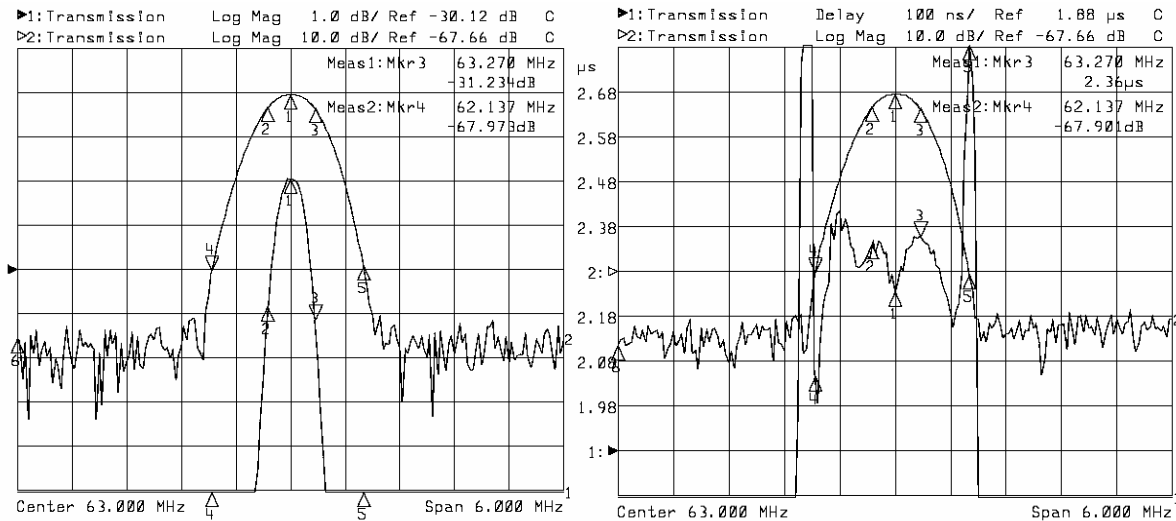

3. Package

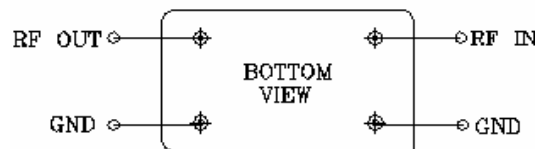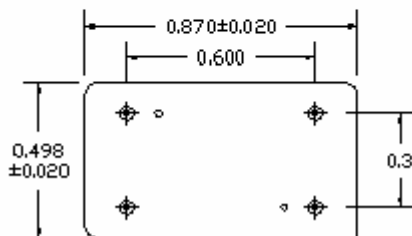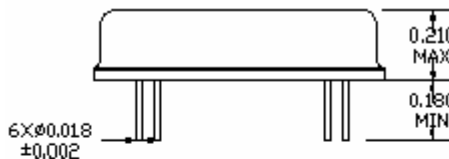

No Matching Required
Source/Load Impedance=50ohm
Package Style XI

4. Marking

S063M005