
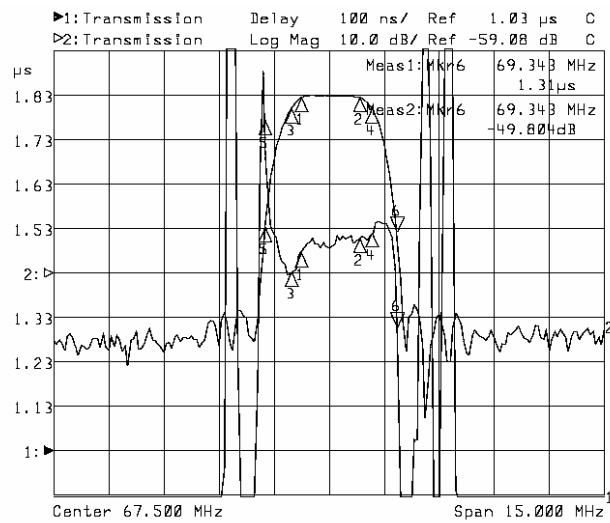




### 1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	67.40	67.50	67.60
Insertion Loss at F <sub>0</sub>	dB		19.04	20.04
0.5 dB Bandwidth	MHz	1.59	1.61	
3 dB Bandwidth	MHz	2.18	2.21	
30dB Bandwidth	MHz		3.58	4.02
Passband Variation	dB		0.35	0.50
Group Delay Variation	nsec		80	100
Absolute Delay	usec		1.51	1.52
Ultimate Rejection	dB	48	50	
Substrate Material	-		LiTaO <sub>3</sub>	
Ambient Temperature	°C	-40	25	80

### 2. Typical Performance

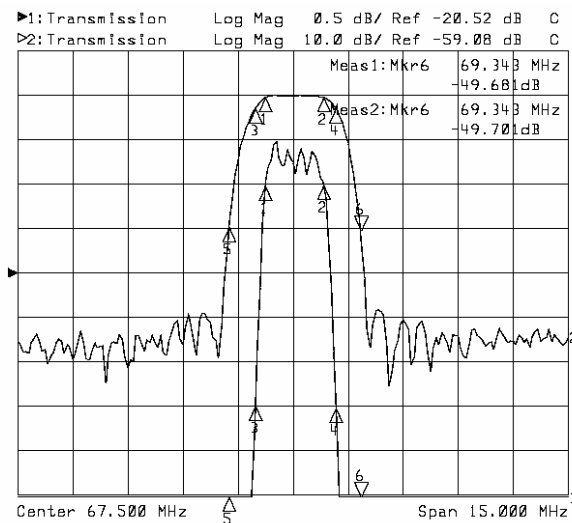

### 3. Package

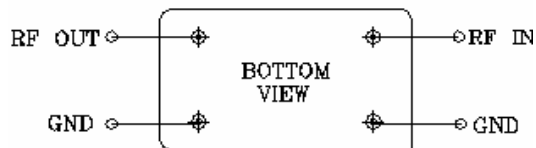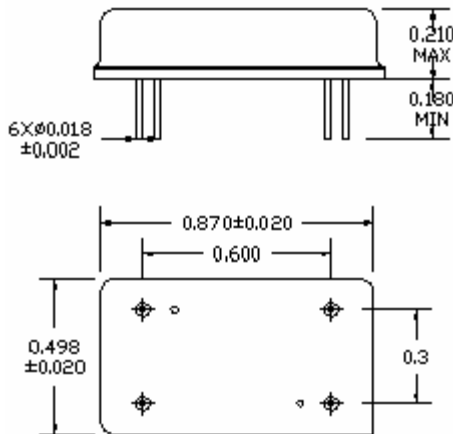

No Matching Required  
Source/Load Impedance=50ohm  
Package Style XI

### 4. Marking

S067M020