



1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	80.40	80.50	80.60
Insertion Loss	dB		20.00	21.00
77.25MHz	dB		-0.50	-1.00
83.75MHz	dB		-0.50	-1.00
76.00MHz	dB		-20.00	-22.00
Passband Variation	dB		0.50	0.70
Group Delay Variation	nsec		80	100
Absolute Delay	usec		1.50	1.52
Ultimate Rejection	dB	48	50	
Substrate Material	-		128-LiNbO3	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

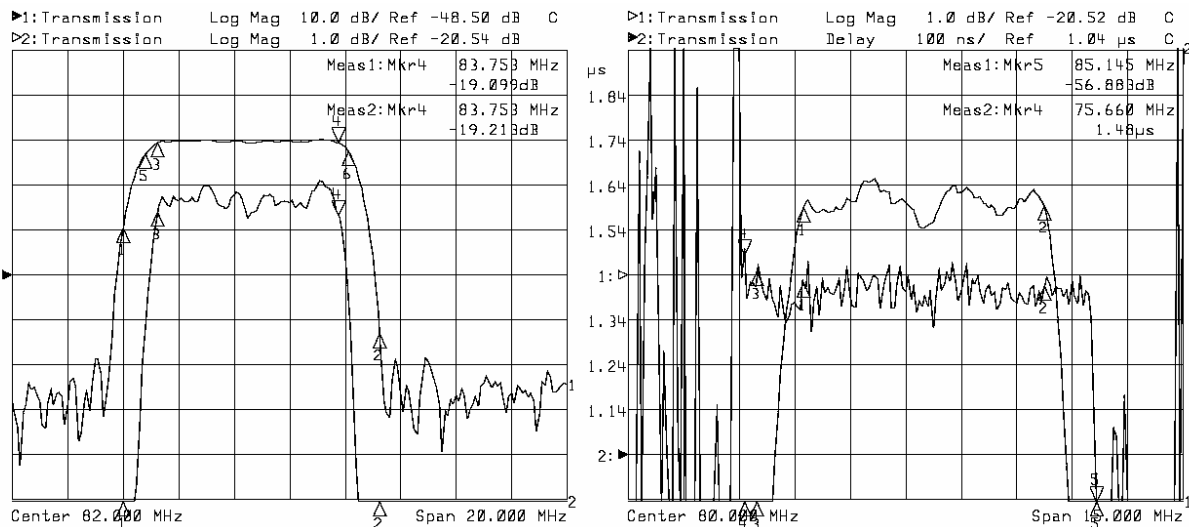

3. Package

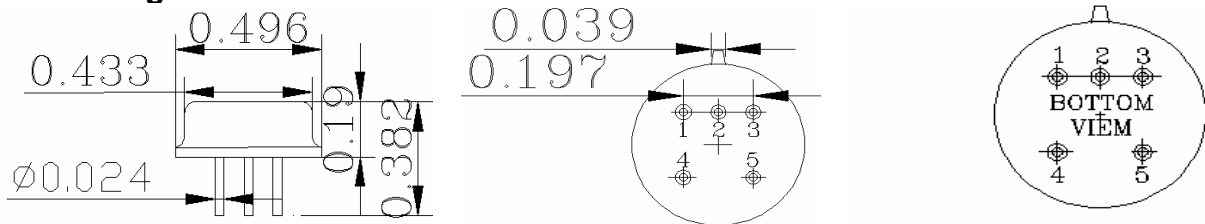

TO-5A IN: 1
OUT: 5
GND: 2, 3, 4

4. Marking

S081M070