
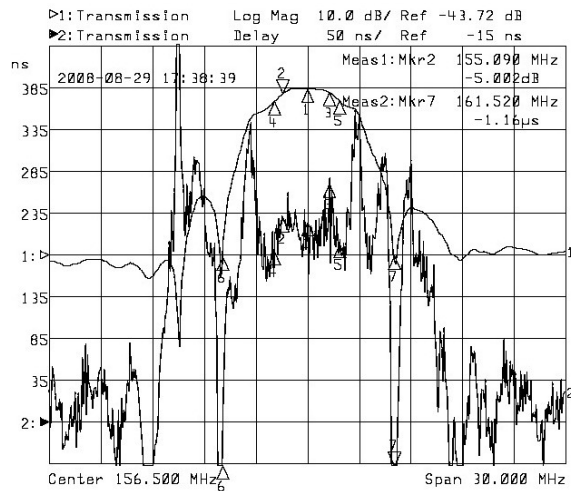




1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	156.40	156.50	156.60
Insertion Loss at F ₀	dB		3.50	4.00
1 dB Bandwidth	MHz	2.60	2.70	
3 dB Bandwidth	MHz	3.70	3.80	
40dB Bandwidth	MHz		9.90	10.00
Passband Variation	dB		0.10	0.20
Group Delay Variation	nsec		70	100
Absolute Delay	usec		0.22	
Ultimate Rejection	dB	25	28	
Substrate Material	-		128LiNbO ₃	
Ambient Temperature	°C		25	

2. Typical Performance

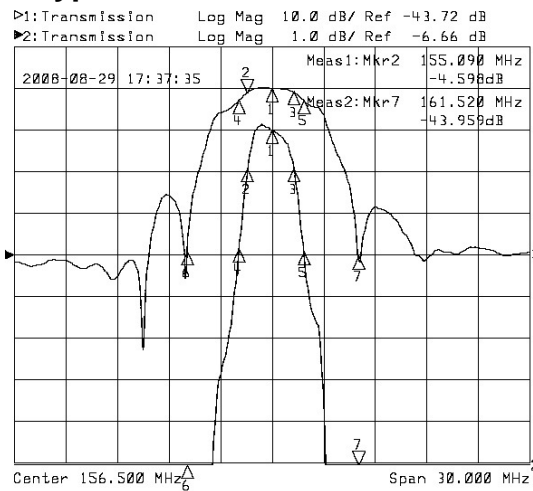

3. Package

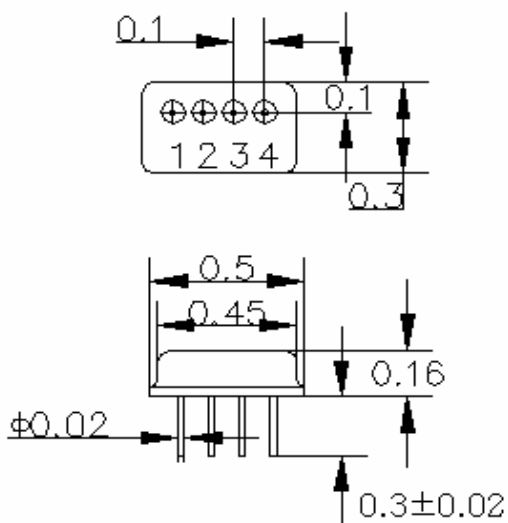

SB-7 Input(Output): 1
 Output(Input): 4
 Input(Output) ground: 3
 Chip carrier-ground: 2

4. Marking

S156M030L