
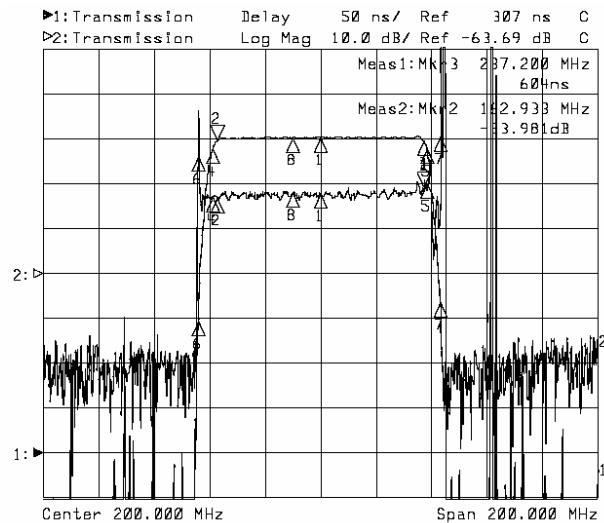




1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	199.75	200.00	200.25
Insertion Loss at F ₀	dB		33.50	34.10
1 dB Bandwidth	MHz	73.86	74.40	
3 dB Bandwidth	MHz	76.52	77.10	
40dB Bandwidth	MHz		87.51	88.12
Passband Variation	dB		0.70	0.90
Group Delay Variation	nsec		15	25
Absolute Delay	usec		0.58	0.60
Ultimate Rejection	dB	42	45	
Substrate Material	-		128-LiNbO3	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

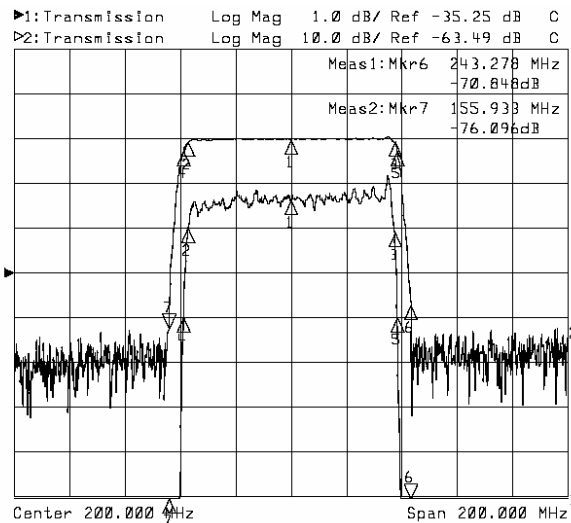

3. Package

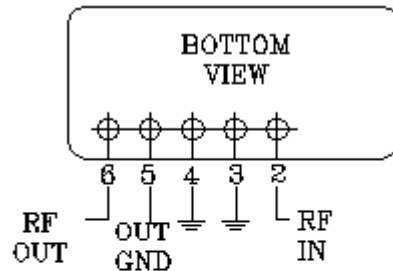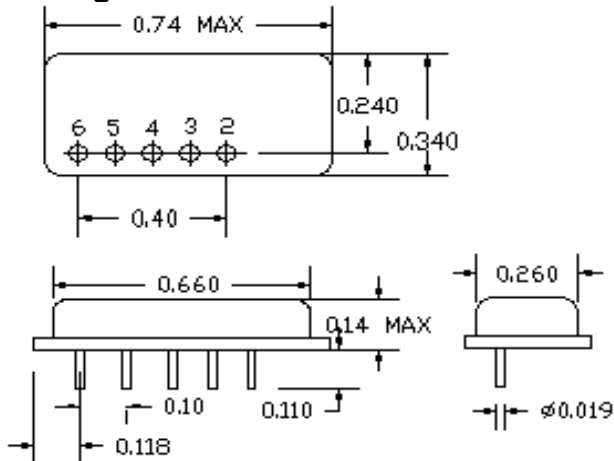

No Matching
 Required
 Source/Load
 Impedance=50ohm
 Package Style XP

4. Marking

S200M750