



1. Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	329.80	330.00	330.20
Insertion Loss at F ₀	dB		35.00	35.82
1 dB Bandwidth	MHz	94.21	95.00	
3 dB Bandwidth	MHz	95.12	96.00	
40dB Bandwidth	MHz		110.00	110.84
Passband Variation	dB		0.80	1.00
Group Delay Variation	nsec		18	20
Ultimate Rejection	dB	48	50	
Substrate Material	-		128LiNbO3	
Ambient Temperature	°C	-40	25	80

2. Typical Performance

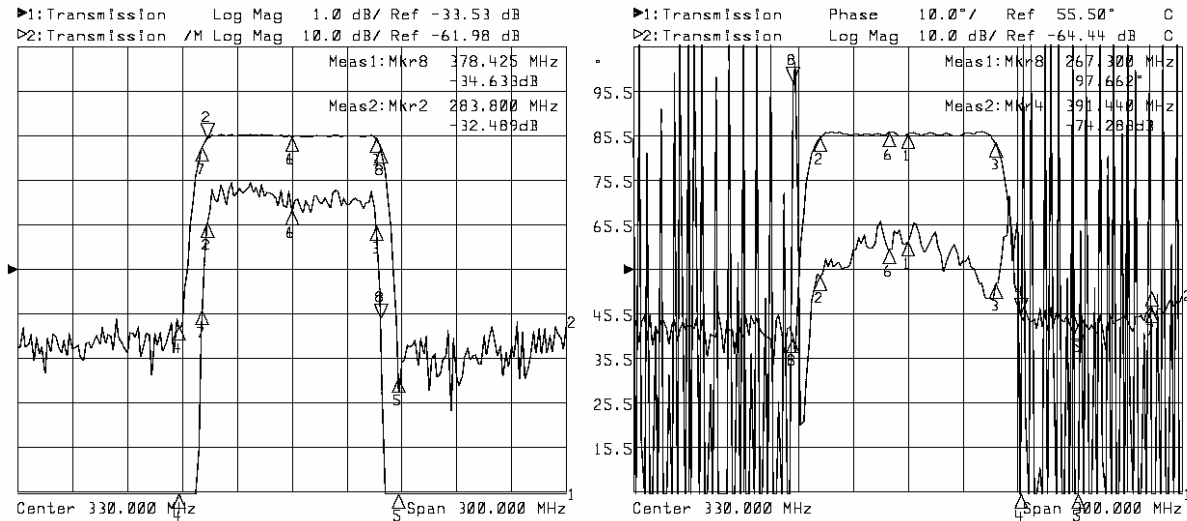

3. Package

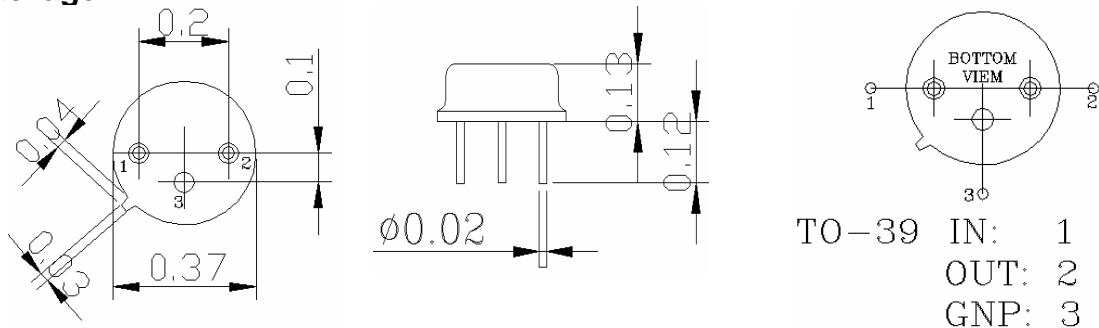

4. Marking

S330M960